

HDMI CONVERTOR

Analog to Digital Converter



OVERVIEW


This Analog to Digital Audio Converter is designed for home or professional audio switching. It can convert analog L/R audio signal to Coaxial or Toslink digital audio signal. At the same time, it can connect to an amplifier via standard RCA-style jacks. Our devices offer solutions for noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.



FEATURE

- Convert analog L/R audio signal to Coaxial or Toslink digital audio signal
- Support 3.5mm audio and RCA audio input
- Support sample rate: 32, 44.1, 48 and 96 KHz
- R/L channel of S/PDIF is 24 bit
- Support electromagnetic-noise-free transmission
- Easy to install and simple to operate

APPLICATIONS

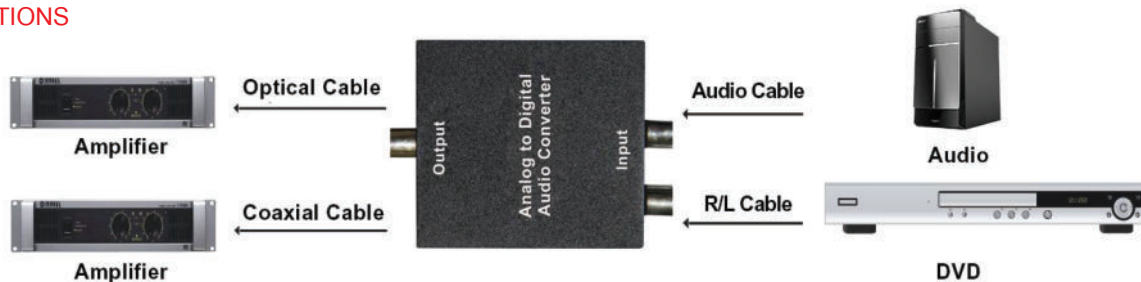

SPECIFICATIONS

Input Audio	L/R analog audio
Output Audio	Coaxial or Toslink digital audio
Input audio connector	2xRCA(L/R), 3.5mm audio
Output audio connector	Toslink, 1XRCA(Coaxial)
Sample rate	32, 44.1, 48 and 96 KHz
Max working current	250mA
Power adapter format	AC (50Hz, 60Hz) 100V-240V; DC 5V/500A
Operating Temperature range	(-15°C to +55°C)
Working humidity range	5% to 90%RH (No Condensation)
Dimension (L x W x H)	45x48x20(mm)
Weight	62g

ORDER INFORMATION

PRODUCT	PART NUMBER
Analog to Digital Converter	MD-AD