

LAN SYSTEM PRODUCTS

CAT6 UTP CABLE INDOOR CMR / LSZH.



PRODUCT DESCRIPTION

High-Performance Data Cable. Indoor UV Rated Jacket. Self-supporting.

4 twisted-Pair cable, Using solid bare copper conductor 23 AWG, insulated with CMR/LSZH Jacket

APPLICATION

1000BAS-T (IEEE802.3ab Gigabit Ethernet) 100BASE-TX (IEEE802.3 i/u/ab Fast Ethernet) ,10BASE-T(IEEE802.3Ethernet) ,52/155/622 Mbps and 1.2Gbps ATM, 10GBASE-T(IEEE 802.3an 10Gigabit Ethernet 55m), POE,POE+(IEEE802.3af, IEEE802.3at) ,TP-PMD, TPDDI, ISDN, VOIP, Analog & Digital Voice, Digital & Analog Video,4/16Mbps Token Ring 2.5G BASE-T, 5G BASE-T (IEEE802.3bz)

STANDARD

- ANSI/TIA-568-C.2 Category 6, ANSI-TIA/EIA-568-B.2 Category 6, TIA/EIA-568 A/B Category 6 , ANSI/TIA-568.2-D
- ISO/IEC11801:2017, ISO/IEC 11801:2002 Class E
- EN50173 Category 6, EN50288-3-1, EN 50288-6-1 , EN 50173-1
- IEC61156-5, NEC800 , UL444
- NEMA MC63.1, NEMAWC63.1 ICEAS-90-661 Category 6
- ICEA S-102-700 Category 6
- RoHS Compliant

TEMPERATURE


Installation - 40 °C to 60 °C

Operating - 40 °C to 60 °C

Storage - 40 °C to 80 °C



L-UI6-SJ-XXX

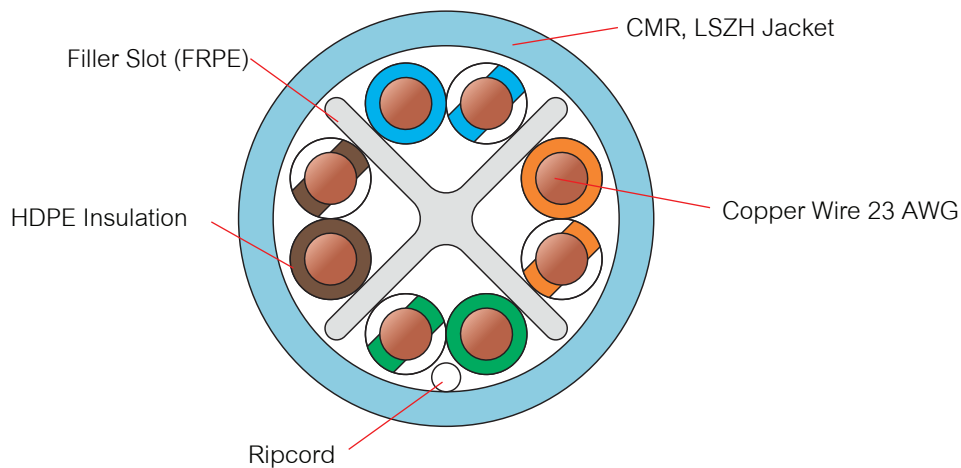

FOCOMM (THAILAND) CO., LTD

12 Soi Sukhaphiban 5 Soi 5 Yaek 3, Tha Raeng Subdistrict, Bang Khen District Bangkok 10220

(+66)6 3391-5262 Email : info@focomm-cabling.com www.focomm-cabling.com



CONSTRUCTION OF CABLE

Conductor	Material	Solid bare copper (BC)
	Diameter	23 AWG (0.57 mm)
Insulation	Material	HDPE (High Density Polyethylene)
	Diameter	1.03 ± 0.2 mm
Outer jacket	Material	PVC CMR/LSZH
	Thickness	1.0 ± 0.2 mm
Ripcord	Under jacket	
Twisting Pair lay Length	<38 mm	
Labling Lay Length	<120 mm	
Separator	FRPE Isolator Separator	
Pair Colors	Pair1 White/Blue -Blue	
	Pair2 White/Orange -Orange	
	Pair3 White/Green- Green	
	Pair4 White/Brown-Brown	
Diameter	5.2 - 6.2 mm ± 0.2 mm.	

ELECTRICAL CHARACTERISTICS & PHYSICAL PROPERTY

Impedance	100+/- 15Ω@600MHz
Mutual Capacitance	5.6nF Max/100 m
Attenuation	32.8 dB / 250Mhz
Return Loss	17.4 dB / 250Mhz
PS NEXT	39.5 dB / 250Mhz
Conductor	<8.2 Ohm/100m
Voltage endurance	DC 1500V/min
Rating Temp Voltage	75 C, 300 Volts
Sheath Thickness	0.55 mm
tensile load	110N(CMR Rate)
Capacitance, Unbalance	160pF Max/100 m
DC Resistance	6.658Ω Max/100 m
DC Resistance, Unbalance	5.0% Max
Insulated Resistance	5000 MΩ/Km
Propagation Delay	536 ns/ 100 m Max @ 600MHz
Delay Skew	40ns/100m
NVP	69%
Flame Rating	Ultimate Breaking Strengt <- 400 N , CMX (UL444)
Minimum Bending Radius	Install 8 X Cable Diameter
	After Install 4 X Cable Diameter

TRANSMISSION PERFORMANCE

FREQUENCY (MHZ)	INSERTION LOSS (dB/100)	NEXT MIN. (dB)	ACR MIN. (dB)	PS.NEXT MIN. (dB)	PS.ACR MIN. (dB)	ELFEXT MIN. (dB/100)	ARC-F MIN. (dB/100)	PS. ELFEXT MIN. (dB/100)	RL MIN(dB)
1	2.0	78.0	76.0	76.0	73.5	69.0	69.0	66.0	20.0
31.25	10.7	56.0	45.3	54.0	42.8	38.5	38.5	35.6	23.6
62.5	15.4	50.5	35.1	52.2	33.0	33.0	33.0	29.5	21.5
100	19.8	47.5	27.7	49.8	25.6	28.5	28.5	25.8	20.1
155	25.1	45.0	19.7	47.2	17.2	25.0	25.0	23.0	18.8
200	29.0	44.4	15.4	45.0	12.3	22.5	22.5	21.7	18.0
250	32.0	45.9	10.9	45.2	6.5	24.2	24.2	18.0	25.3
300	36.4	41.5	4.9	40.7	1.9	18.5	18.5	15.6	16.8
400	43.0	38.5	N/A	37.5	N/A	16.5	16.5	13.7	15.9
550	51.8	36.7	N/A	34.5	N/A	13.5	13.5	10.7	14.9
600	54.5	39.5	N/A	36.5	N/A	22.7	15.0	10.0	22.7

ORDER INFORMATION

PRODUCT	PART NUMBER
Cat6 UTP Cable 23AWG, 600MHz, CMR	L-UI6-SJ-CMR
Cat6 UTP Cable 23AWG, 600MHz, LSZH	L-UI6-SJ-LSZH