

# FIBER OPTIC CABLE PRODUCT

ADSS FIBER OPTIC DOUBLE JACKET



## PRODUCT DESCRIPTION


- The cable shall be used for aerial or duct installed.
- Provide additional mechanical protection.
- low friction installation.
- Excellent protection from environmental hazards.
- Single Mode.
- Color code fiber and Loose tube in standard

## APPLICATION

- Environment with high electric field strength in the Power communication system and the area where frequent thunder happens.
- Ethernet LAN Network, CCTV, Network Camera, PLC.

## STANDARD

- ATM, FDDI, FTTX, Fiber Channel, CATV, Communication
- ISO/IEC 11801:2007, ISO/IEC 11801:2011(Ed.2.2)
- ANSI/TIA/EIA-568-B.3, ANSI/TIA-568-C.3, ANSI/TIA-568.3-D, ANSI/ICEA 640
- Telcordia (Bellcore)GR-20CORE, GR-409-CORE
- ANSI/ICEA 596, ICEA696, IEC61034-2, IEC60754-2, IEC60793, IEC60794-1-2
- ITU G.652D, ITU-TG 657A2
- TIA/EIA-598-C (Rev.TIA/EIA-598-A), EIA-359-A.
- IEEE802.3z, IEEE802.3ae, IEEE802.3 (LAN, Ethernet Fast Ethernet, Gigabit Ethernet and 10 Gigabit Ethernet 40-100 Gbps)
- RoHS compliant
- TIS 2166-2548
- Made in Thailand : MIT

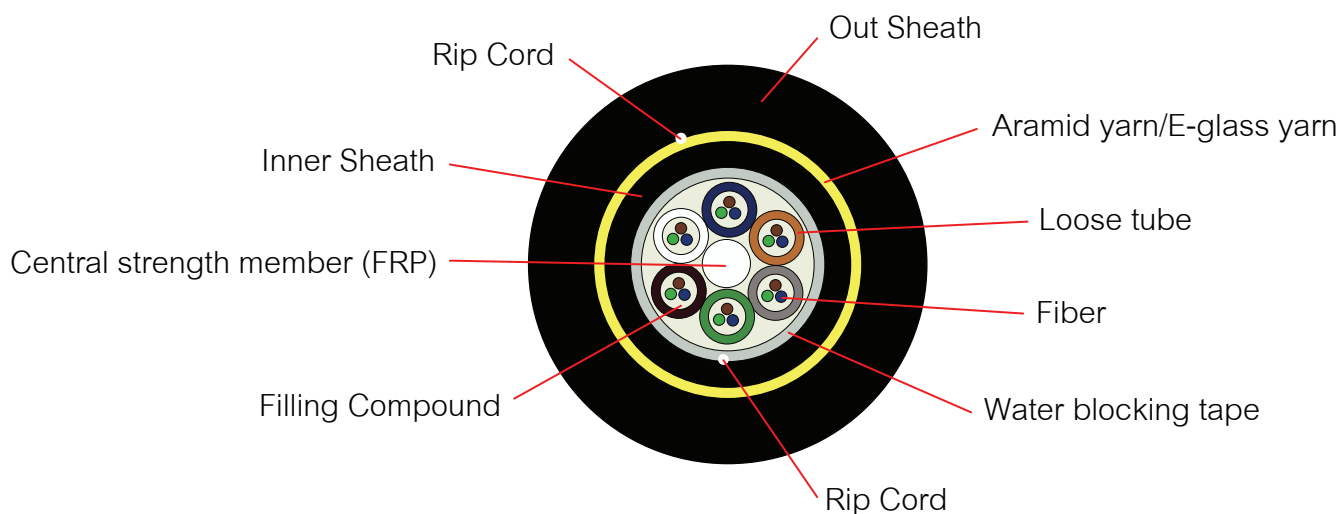

## CONSTRUCTION CABLE

Cable type	ADSS	
Element	-	6
Central strength member	Material	FRP (1.8mm)
Loose tube	Material	PBT
	Diameter	2.0mm
	-	6 fiber per tube, Thixotropic Jelly compound.
Protective tape	Material	Water-blocking tape and Water Swallable yarn
Strength member	Material	Aramid yarns/E-glass yarn
Outer Sheath	Material	UV-Proof Black HDPE (non Rodent Repellent / Rodent Repellent(LS2))
	Thickness	1.8 ± 0.2 mm
Inner Sheath	Material	Black PE
	Material	Water blocking tape
Overall diameter	Diameter	13.4mm-16.4mm
Weight	-	Approx. 180kg/km
Tensile Load	Short term	5000N
	Long term	4000N
Bending radius	Short term	20H
	Long term	10H
Span		40-80m
Temperature Range	Operation	-40+70 °C
	Installation	-40+70 °C
	Storage	-40+75 °C
Pole mount		80 m and wind force 126 Km/hr
Rip Cord	Material	Polyester cords or Aramid yarn
	Number	2

## OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
<b>Mechanical Specifications</b>		
Proof test level		≥1.0 %
Fiber curl radius		≥4.0 m
Peak coating strip force		1.3 - 8.9N
Relative humidity		Up to 90%, no frost
Maximum Span Length	Sag 0.5%	40 m.
	Sag 1.0%	80 m.
Maximum Wind Velocity		80 m and wind force 126 Km/hr
Max. Tensile load	Installation	5000 N.
	Operation	4000 N.
Maximum Crush resistance		3,400 N./10 cm.
Minimum bending Radius	Installation	20 x Diameter of Cable
	Operation	10 x Diameter of Cable

## OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
<b>Optical Specifications</b>		ITU-T G.652D(SinglemodeOS2) 9/125 μm (OS2) ITU-T G651(Multimode) 62.5/125 μm , 50/125 μm
Attenuation	@1310nm	≤0.35/≤0.33dB/km
	@1383nm	≤0.35/≤0.31dB/km
	@1490nm	≤0.24db/km
	@1550nm	≤0.21/≤0.19dB/km
	@1625nm	≤0.23/≤0.20dB/km
Attenuation discontinuity		≤0.05 dB
Attenuation vs. Wavelength	1285 -1330 @1310nm	≤0.05 dB/km
	1525 -1575@1550nm	≤0.05 dB/km
Zero dispersion wavelength		1300 -1324 nm
Zero dispersion slope		≤0.092 ps/(nm <sup>2</sup> .km)
Dispersion	@1310nm	≤3.5 ps/nm.km
	@1550nm	≤18 ps/nm.km
Polarization mode dispersion(PMD)		≤0.1 ps/km ½
Cable cutoff wavelength (λ <sub>cc</sub> )		≤1260 nm
Effective group index of reaction	@1310nm	1.4675
	@1550nm	1.4681
<b>Geometric Specifications</b>		
Mode field diameter	@1310nm	9.2 ± 0.6 μm
	@1550nm	10.4 ± 0.8 μm
Cladding diameter		125 ± 1 μm
Cladding non -circularity		≤1.0 %
Coating Material	Material	UV curable acrylate
	Diameter	250 ± 5μm
Coating/Cladding concentricity error		≤12 μm
Core/Cladding concentricity error		≤0.5μm
Color Fiber Diameter		250 μm ± 15 μm (Colored)
Fiber proof-tested		0.69 GPa ( 1.0%, 100kpsi) in accordance with the optical fiber proof test by IEC 60793-1-30

## IDENTIFICATION COLOR CODE OF FIBER AND LOOSE TUBE

The color code of the loose tubes and the individual fibers within each loose tube shall be in accordance TIA/EIA-598-C (Rev.TIA/EIA-598-A) and EIA-359-A

NO.	FIBER COLOR	LOOSE TUBE COLOR
1	Blue	Blue
2	Orange	Orange
3	Green	Green
4	Brown	Brown
5	Slate	Slate
6	White	White
7	Red	Red
8	Black	Black
9	Yellow	Yellow
10	Violet	Violet
11	Rose	Rose
12	Aqua	Aqua

## PACKING AND DRUM

The cable is rounded on a non-returnable wooden drum. Cable Packing 4000m/reel. Both ends of cable are securely fastened to drum and sealed with a shrinkable cap to prevent ingress of moisture. The following information shall be marked on the outer sheath of the cable at an interval of about 1 meter.

- Cable type and number of optical fiber
- Manufacturer name
- Month and Year of Manufacture
- Cable length
- Logo and Thai word

The sequential number of the cable length shall be marked on the outer sheath of the cable at an interval of 1meter  $\pm$  1%

## TEST REQUIREMENTS

Item	Method	Acceptance criteria
Tensile test	- Max. tensile strength: 3000 N	-Fiber strain at maximum
IEC 60794-1-2-E1A	- Sample length: 100 meters	-Load max. 0.33 %
TIA/EIA-455-33A	- Times: 1 hour	-Attenuation increase $\leq 0.1$ dB
Crush or Compression test	- Load: 2200 N	-No splits or cracks in the outer jacket
IEC 60794-1-2-E3	- Time: 10 minutes	-Attenuation increase $\leq 0.10$ dB
TIA/EIA-455-41A	- Length: 100 mm	
Impact test	- Impact energy: 450 g	- No splits or cracks in the outer jacket
IEC 60794-1-2-E4	- Height: 1 meter	-Attenuation increase $\leq 0.10$ dB (after the test)
TIA/EIA-455-25C	- Impact points: min.1	
	- Number of impacts: 5	
Torsion or Twist test	- 1 m cable length with 150 N weight	- No splits or cracks in the outer jacket
IEC 60794-1-2-E7	- $\pm 180^\circ$ ,10 cycles	-Attenuation increase $\leq 0.10$ dB (after the test)
TIA/EIA-455-85A		
Repeated bending	- Radius = 20 × cable outer diameter	- No splits or cracks in the outer jacket
Cable bending Test	- 1m cable length with 150 N weight, 30 cycles	-Attenuation increase $\leq 0.10$ dB (after the test)
IEC 60794-1-2-E6,		
TIA/EIA-455-104A		
IEC 60794-1-2-E11B		
Temperature cycling test	- Temperature step: +20 °C -40 °C+70 °C-40 °C	-Attenuation variation for reference
IEC 60794-1-2-F1	+70 °C+20 °C	value(the attenuation to be measured before
TIA/EIA-455-3A	- Time per each step: 16 hrs.	test at +20 $\pm$ 3 ) $\leq 0.10$ dB/km
	- Number of cycles: 2 cycles	
Water penetration test	- Water height: 1m	-No water leakage at the end of the sample
IEC 60794-1-2-F5	- Sample length:3m	
TIA/EIA-455-82B	- Duration of test: 24hrs	
Drip test	- Five 0.3m samples suspended vertically in a climate	-No filling compound shall drip from tubes after 24 hrs.
IEC 60794-1-2-E14	chamber, raised temperature to +70°C	

## ORDER INFORMATION

