

FIBER OPTIC CABLE

ADSS FIBER OPTIC SINGLE JACKET



PRODUCT DESCRIPTION



- The cable shall be used for aerial or duct installed.
- Provide additional mechanical protection.
- low friction installation.
- Excellent protection from environmental hazards.
- Single Mode (9/125 um).
- Color code fiber and Loose tube in standard.

APPLICATION

- Outdoor environment with high electric field strength in the Power communication system and the area where frequent thunder happens suitable for both aerial or duct installation.
- Ethernet LAN Network, CCTV, Network Camera, PLC

STANDARD

- ATM, FDDI, FTTX, Fiber Channel, CATV, Communication
- ISO/IEC 11801:2007, ISO/IEC 11801:2011 (Ed.2.2)
- ANSI/TIA/EIA-568-B.3, ANSI/TIA-568-C.3, ANSI/TIA-568.3-D, ANSI/ICEA 640
- Telcordia (Bellcore) GR-20CORE, GR-409-CORE
- ANSI/ICEA 596, ICEA 696, IEC 61034-2, IEC 60754-2, IEC 60793, IEC 60794-1-2
- ITU-T G.652D, ITU-TG 657A2
- TIA/EIA-598-C (Rev. TIA/EIA-598-A), EIA-359-A.
- IEEE 802.3z, IEEE 802.3ae, IEEE 802.3 (LAN, Ethernet Fast Ethernet, Gigabit Ethernet and 10 Gigabit Ethernet 40-100 Gbps)
- RoHS compliant
- TIS 2166-2548
- Made in Thailand : MIT

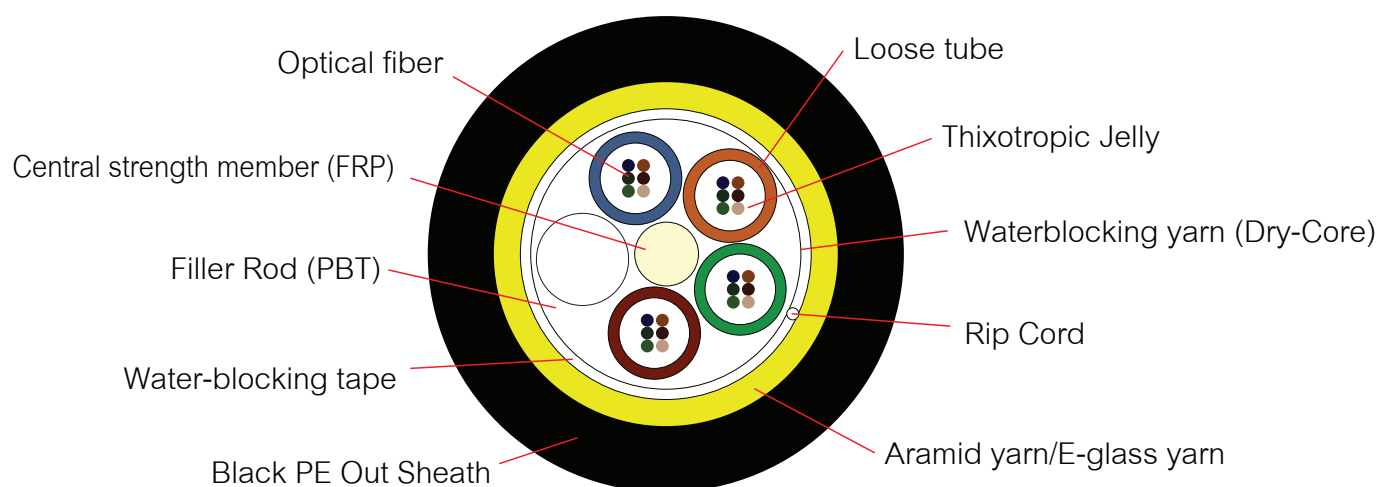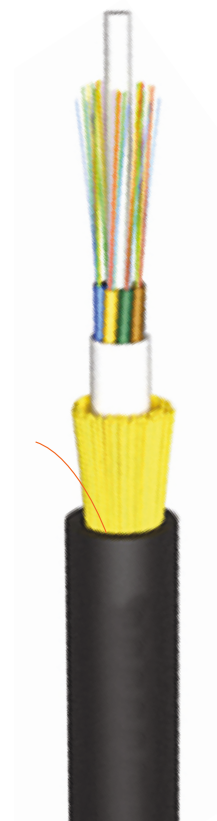

FOCOMM (THAILAND) CO., LTD

12 Soi Sukhaphiban 5 Soi 5 Yaek 3, Tha Raeng Subdistrict, Bang Khen District Bangkok 10220

(+66)6 3391-5262 Email : info@focomm-cabling.com www.focomm-cabling.com



CONSTRUCTION CABLE

Cable type		ADSS
Element	-	5
Central strength member	Material	FRP 1.5mm
Loose tube	Material	PBT
	Diameter	2.0 ± 0.2 mm
	-	6 fiber per tube, Thixotropic Jelly compound.
water blocking element	Material	Water -blocking tape and Water Swallable yarn
Strength member	Material	Aramid yarns
	Thickness	0.5 mm
Outer Sheath	Material	UV-Proof Black HDPE (non Rodent Repellent/Rodent Repellent)
	Thickness	1.8±0.2mm
Tensile Load	Short term	4000N
	Long term	1800N
	Pressure	2200N/10CM
Overall diameter	Diameter	9.5 mm
Weight	-	Approx. 43±10 kg/km
Span Length		40-80m
Temperature Range	Operation	-40 + 70°C
	Storage	-40 + 75°C
	Installing	-40 + 70°C
Relative humidity		Up to 90%, no frost
Pole mount	-	80 m and wind force 128 Km/hr
Bending	Installing	20
	Using	10
Rip Cord	Material	Polyester cords or Aramid yarn
	Number	One

BUFFER TUBE STRANDING

Fiber count	Fiber number per tube	Number of tube / filler	Nom. Diameter(mm)	Nom. Weight(kg/km)
12	6	2/3	11.4 - 12	100
24	6	4/1	11.4 - 12	100
48	12	4/1	11.8 - 12.5	105
60	12	5/0	11.8 - 12.5	105

OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
Optical Specifications		ITU-T G.652D(SinglemodeOS2) 9/125 μm (OS2) ITU-T G651(Multimode) 62.5/125 μm , 50/125 μm
Attenuation	@1310nm	$\leq 0.35/\leq 0.33\text{dB/km}$
	@1383nm	$\leq 0.35/\leq 0.31\text{dB/km}$
	@1490nm	$\leq 0.24\text{db/km}$
	@1550nm	$\leq 0.21/\leq 0.19\text{dB/km}$
	@1625nm	$\leq 0.23/\leq 0.20\text{dB/km}$
Attenuation discontinuity		$\leq 0.05\text{ dB}$
Attenuation vs. Wavelength	1285 -1330 @1310nm	$\leq 0.05\text{ dB/km}$
	1525 -1575@1550nm	$\leq 0.05\text{ dB/km}$
Zero dispersion wavelength		1300 -1324 nm
Zero dispersion slope		$\leq 0.092\text{ ps}/(\text{nm}^2.\text{km})$
Dispersion	@1310nm	$\leq 3.5\text{ ps/nm.km}$
	@1550nm	$\leq 18\text{ ps/nm.km}$
Polarization mode dispersion(PMD)		$\leq 0.1\text{ ps/km}^{1/2}$
Cable cutoff wavelength (λ_{cc})		$\leq 1260\text{ nm}$
Effective group index of reaction	@1310nm	1.4675
	@1550nm	1.4681
Geometric Specifications		
Mode field diameter	@1310nm	$9.2 \pm 0.6\text{ }\mu\text{m}$
	@1550nm	$10.4 \pm 0.8\text{ }\mu\text{m}$
Cladding diameter		$125 \pm 1\text{ }\mu\text{m}$
Cladding non -circularity		$\leq 1.0\%$
Coating Material	Material	UV curable acrylate
	Diameter	$250 \pm 5\text{ }\mu\text{m}$
Coating/Cladding concentricity error		$\leq 12\text{ }\mu\text{m}$
Core/Cladding concentricity error		$\leq 0.5\text{ }\mu\text{m}$
Color Fiber Diameter		$250\text{ }\mu\text{m} \pm 15\text{ }\mu\text{m}$ (Colored)
Fiber proof-tested		0.69 GPa (1.0%, 100kpsi) in accordance with the optical fiber proof test by IEC 60793-1-30

OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
Mechanical Specifications		
Proof test level		≥ 1.0 %
Fiber curl radius		≥ 4.0 m
Peak coating strip force		1.3 - 8.9N
Relative humidity		Up to 90%, no frost
Maximum Span Length	Sag 0.5%	40 m.
	Sag 1.0%	80 m.
Maximum Wind Velocity		80 m and wind force 126 Km/hr
Max. Tensile load	Installation	4000 N. for 6-96 Cores
	Operation	1800 N. for 6-96 Cores
Maximum Crush resistance		2200 N./10 cm.
Minimum bending Radius	Installation	20 x Diameter of Cable
	Operation	10 x Diameter of Cable

IDENTIFICATION COLOR CODE OF FIBER AND LOOSE TUBE

The color code of the loose tubes and the individual fibers within each loose tube shall be in accordance TIA/EIA-598-C (Rev.TIA/EIA-598-A) and EIA-359-A

NO.	FIBER COLOR	LOOSE TUBE COLOR
1	Blue	Blue
2	Orange	Orange
3	Green	Green
4	Brown	Brown
5	Slate	Slate
6	White	White
7	Red	Red
8	Black	Black
9	Yellow	Yellow
10	Violet	Violet
11	Rose	Rose
12	Aqua	Aqua

PACKING AND DRUM

The cable is rounded on a non-returnable wooden drum. Cable Packing 4000m/reel. Both ends of cable are securely fastened to drum and sealed with a shrinkable cap to prevent ingress of moisture. The following information shall be marked on the outer sheath of the cable at an interval of about 1 meter.

- Cable type and number of optical fiber
- Manufacturer name
- Month and Year of Manufacture
- Cable length
- Logo and Thai word

The sequential number of the cable length shall be marked on the outer sheath of the cable at an interval of 1meter $\pm 1\%$

TEST REQUIREMENTS

Item	Method	Acceptance criteria
Tensile test	- Max. tensile strength: 3000 N	-Fiber strain at maximum
IEC 60794-1-2-E1A	- Sample length: 100 meters	-Load max. 0.33 %
TIA/EIA-455-33A	- Times: 1 hour	-Attenuation increase ≤ 0.1 dB
Crush or Compression test	- Load: 2200 N	-No splits or cracks in the outer jacket
IEC 60794-1-2-E3	- Time: 10 minutes	-Attenuation increase ≤ 0.10 dB
TIA/EIA-455-41A	- Length: 100 mm	
Impact test	- Impact energy: 450 g	- No splits or cracks in the outer jacket
IEC 60794-1-2-E4	- Height: 1 meter	-Attenuation increase ≤ 0.10 dB (after the test)
TIA/EIA-455-25C	- Impact points: min.1	
	- Number of impacts: 5	
Torsion or Twist test	- 1 m cable length with 150 N weight	- No splits or cracks in the outer jacket
IEC 60794-1-2-E7	- $\pm 180^\circ$,10 cycles	-Attenuation increase ≤ 0.10 dB (after the test)
TIA/EIA-455-85A		
Repeated bending	- Radius = 20 $\times$ cable outer diameter	- No splits or cracks in the outer jacket
Cable bending Test	- 1m cable length with 150 N weight, 30 cycles	-Attenuation increase ≤ 0.10 dB (after the test)
IEC 60794-1-2-E6,		
TIA/EIA-455-104A		
IEC 60794-1-2-E11B		
Temperature cycling test	- Temperature step: +20 $^\circ$ C -40 $^\circ$ C+70 $^\circ$ C-40 $^\circ$ C	-Attenuation variation for reference
IEC 60794-1-2-F1	+70 $^\circ$ C+20 $^\circ$ C	value(the attenuation to be measured before
TIA/EIA-455-3A	- Time per each step: 16 hrs.	test at +20 $\pm$ 3) ≤ 0.10 dB/km
	- Number of cycles: 2 cycles	
Water penetration test	- Water height: 1m	-No water leakage at the end of the sample
IEC 60794-1-2-F5	- Sample length:3m	
TIA/EIA-455-82B	- Duration of test: 24hrs	
Drip test	- Five 0.3m samples suspended vertically in a climate	-No filling compound shall drip from tubes after 24 hrs.
IEC 60794-1-2-E14	chamber, raised temperature to +70 $^\circ$ C	

ORDER INFORMATION

