


FIBER OPTIC ACCESSORIES

PIGTAIL OM3 LC , MM



FEATURES

- Low insertion loss, high return loss
- Good in repeatability and exchangeability
- High temperature stability
- Excellent end face geometry
- ISO9001:2008, ROHS
- Customizable fiber cable length, jacket color, connector type and label, etc.
- All products undergo 100% strict quality inspection before shipment.

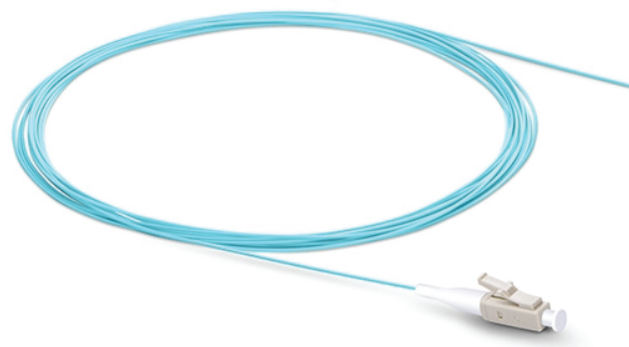

PRODUCT PARAMETERS

Pigtail LC	multimode
	OM3
Polishing	PC
Return loss	≥ 20 dB
Insertion loss	$\leq 0,3$ dB
Length	2 m
Sheath material	halogen-free secondary EASySTRIP protection of 900 μ m
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Temperature range	-20 °C to +60 °C
Outer diameter	900 \pm 5 μ m
Bending radius (static)	10 x 0,9 mm
Attenuation @ 850 / 1300 nm (dB/km)	$\leq 3,2$ / $\leq 0,8$
Bandwidth 850 / 1300 nm (MHz.km)	≥ 500 / ≥ 500

ORDER INFORMATION

PRODUCT	PART NUMBER
Pigtail LC, OM3 MM 50/125um (900um Jacket)	F-PT-OM3-LC9-0.9mm
Pigtail LC, OM3 MM 50/125um (2mm Jacket)	F-PT-OM3-LC9-2mm