

LAN SYSTEM PRODUCTS

CAT6 UTP CABLE OUTDOOR DROP WIRE DOUBLE JACKET.



PRODUCT DESCRIPTION

High-Performance Data Cable. Can be installed both outdoors and indoors
Self-supporting.4 twisted-Pair cable, Using solid bare copper conductor 23 AWG,
Cross Filler ,insulated with HDPE Jacket

APPLICATION

1000BASE-T (IEEE802.3ab Gigabit Ethernet), 10/100/1000 Mbps Standard UTP 6E,
100BASE-TX(IEEE802.3 i/u/ab Fast Ethernet), 10BASE-T(IEEE802.3 Ethernet)
52/155/622 Mbps and 1.2Gbps ATM, 2.5G/5G Base-T(IEEE802.3bz),
10GBASE-T(IEEE802.3an 10Gigabit Ethernet, 55m),POE,POE+ (IEEE802.3af,
IEEE802.3at) TP-PMD, 100 Mbps TPDDI, ISDN, VOIP, Analog & Digital Voice,
Digital & Analog Video, 10 BASE-T,Broadband video, Digital & Analog For data,
video& audio application, 4/16Mbps Token Ring, HD BaseT 2.0 standard, Baseband,
Broadband.

STANDARD

- ANSI/TIA-568-C.2 Category 6, ANSI/TIA-568.2-D,
- ISO/ICE 11801:2002 Class E, ISO/ICE 11801:2017 Class E,
- IEC 61156-5 , IEC 60332-1
- EN 50173-1 Category 6, EN 50288-6-1
- ICEA S-102-700 Category 6,
- NEMA WC 66, ASTM, D4566-98,
- UL/CSA Listed CM,CMR,CMP and LSZH, ETL and 3P Verify to
TIA-568-C.2 CAT6
- UL444 , NEC800 , RoHS Compliant.


TEMPERATURE

Installation - 40 °C to 75 °C


Operating - 40 °C to 75 °C

Storage - 40 °C to 80 °C

Rating Temp Voltage 75 °C, 300Volts

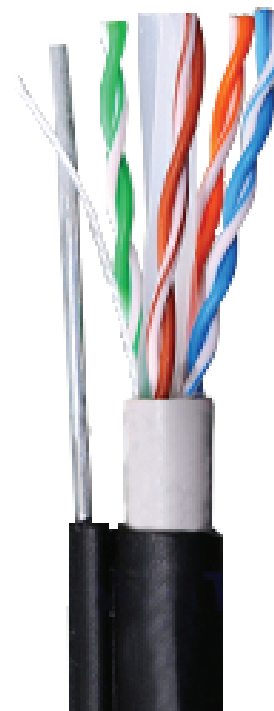

L-UO6-DW-DJ

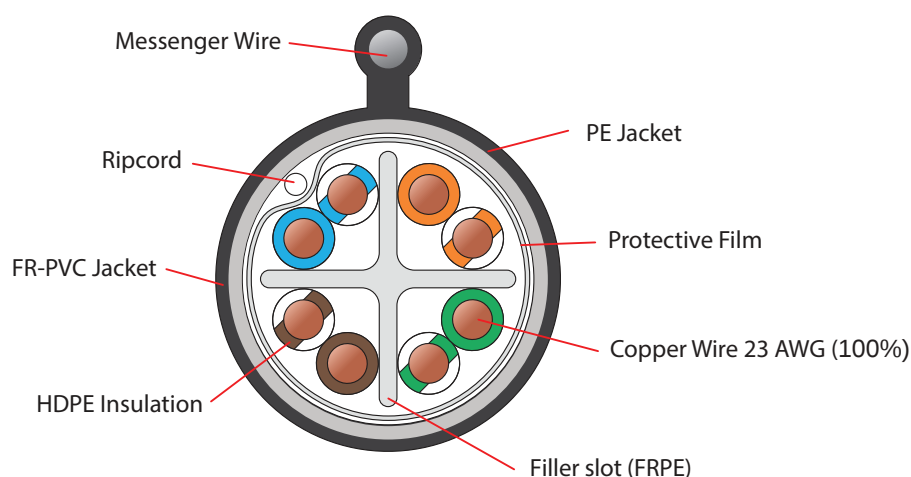

FOCOMM (THAILAND) CO., LTD

12 Soi Sukhaphiban 5 Soi 5 Yaek 3, Tha Raeng Subdistrict, Bang Khen District Bangkok 10220

(+66)6 3391-5262 Email : info@focomm-cabling.com www.focomm-cabling.com



CONSTRUCTION OF CABLE

Conductor	Material	Solid bare copper
	Diameter	23 AWG (0.57mm)BC
Insulation	Material	HDPE
	Thickness	1.02 mm
	Diameter	1.5 ± 0.5 mm.
Outer jacket	Material	PE ,UV ProofLead free ,
Inner jacket	Material	FR-PVC , 6.00 mm.
Messenger Wire	Material	Galvanize Steel Wire ,1.3 mm
Ripcord	Under jacket	
Pair Colors	Pair1 White/Blue-Blue	
	Pair2 White/Orange -Orange	
	Pair3 White/Green-Green	
	Pair4 White/Brown-Brown	
Diameter	10.4 ± 0.5mm	
Tensile	150 N	

ELECTRICAL CHARACTERISTICS & PHYSICAL PROPERTY

Impedance	100+/-15Ω
Mutual Capacitance	5.6nF Max/100 m
Capacitance, Unbalance	160pF Max/100 m
DC Resistance	6.658Ω Max/100 m
DC Resistance, Unbalance	2.5% Max
Insulated Resistance	5000 MΩ/Km
Dielectric Strength	1KV/min
Propagation Delay	536 ns/ 100 m Max @ 600MHz
Delay Skew	30 ns Max
NVP	69%
Flame Rating	CMX (UL444)
Minimum Bending Radius	Install 8 X Cable Diameter
	After Install 4 X Cable Diameter
Tension	16.5 MPa or 2400 PSI

TRANSMISSION PERFORMANCE

FREQUENCY (MHZ)	INSERTION IOSS (dB/100)	NEXT MIN. (dB)	ACR MIN. (dB)	PS.NEXT MIN. (dB)	PS.ACR MIN. (dB)	ELFEXT MIN. (dB/100)	ARC-F MIN. (dB/100)	PS. ELFEXT MIN. (dB/100)	RL MIN(dB)
1	2.0	78.0	76.0	76.0	73.5	69.0	69.0	66.0	20.0
31.25	10.7	56.0	45.3	54.0	42.8	38.5	38.5	35.6	23.6
62.5	15.4	50.5	35.1	52.2	33.0	33.0	33.0	29.5	21.5
100	19.8	47.5	27.7	49.8	25.6	28.5	28.5	25.8	20.1
155	25.1	45.0	19.7	47.2	17.2	25.0	25.0	23.0	18.8
200	29.0	44.4	15.4	45.0	12.3	22.5	22.5	21.7	18.0
250	28.69	42.9	10.9	43.2	6.5	21.2	21.2	18.0	25.3
300	32.8	41.5	4.9	40.7	1.9	18.5	18.5	15.6	16.8
400	39.7	38.5	N/A	37.5	N/A	16.5	16.5	13.7	15.9
550	48.9	36.7	N/A	34.5	N/A	13.5	13.5	10.7	14.9
600	51.1	36.5	N/A	34.5	N/A	13.0	13.0	10.0	22.7

ORDER INFOMATION

PRODUCT	PART NUMBER
Cat6 UTP Cable, Outdoor Drop Wire Double Jacket, 23AWG, 600MHz	L-UO6-DW-DJ