
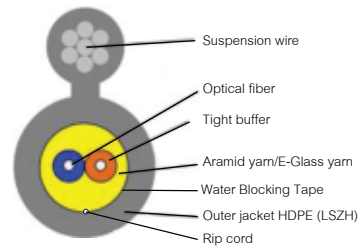


FTTH (Fiber Optic To The Home)

- FTTH Strand Drop Wire Round
- FTTH Strand Drop Wire Flat
- FTTH Strand Fig-8 Drop Wire Flat
- Accessorier for FTTH
- FTTH Terminal Box Indoor
- Wall Mount Outdoor

FTTX Strand Drop Wire Round

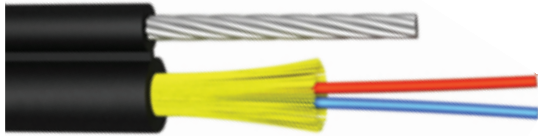

PROPERTIES

- Excellent performance
- Low insertion loss and high return loss
- High tensile strength
- Telcorda GR326, IEC, TIA/EIA standard compliant



APPLICATION

- Communication network
- Optical distribution network
- Lan system
- FTTH

STANDARD

ANSI/TIA-568-C.3, ANSI/TIA/EIA-568-B.3, ISO/IEC 11801:2002, ANSI/ICEA 696, Telcordia (Bellcore) GR-20-CORE, ITU-T G.652D (Singlemode), ITU-T G.651 (Multimode), IEC 60332-1, IEC 60332-2& IEC 60332-3, IEC 60793/60794, ANSI/ICEA 596, EIA/TIA-455, UL, RoHS Compliant 2002/95/EC

FTTX Strand Drop Wire Flat

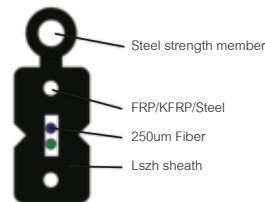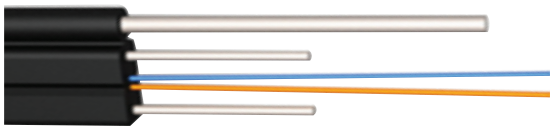

PROPERTIES

- Excellent performance
- Low insertion loss and high return loss
- High tensile strength
- Telcorda GR326, IEC, TIA/EIA standard compliant



APPLICATION

- Adopted to outdoor level and vertical distribution.
- Suitable for connect with communication equipment.
- Long distance and local area network communication.

STANDARD

ANSI/TIA-568-C.3, ANSI/TIA/EIA-568-B.3, ISO/IEC 11801:2002, ANSI/ICEA 696, Telcordia (Bellcore) GR-20-CORE, ITU-T G.652D (Singlemode), ITU-T G.651 (Multimode), IEC 60332-1, IEC 60332-2& IEC 60332-3, IEC 60793/60794, ANSI/ICEA 596, EIA/TIA-455, UL, RoHS Compliant 2002/95/EC

FTTX Strand Fig-8 Drop Wire Flat

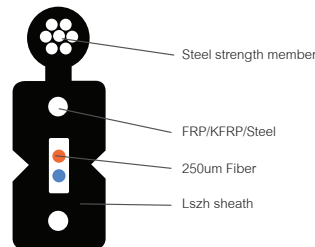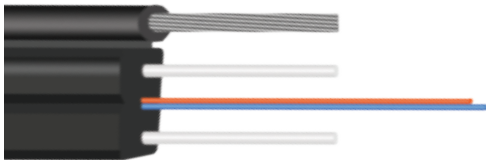

PROPERTIES

- Excellent performance
- Low insertion loss and high return loss
- High tensile strength
- Telcorda GR326, IEC, TIA/EIA standard compliant

APPLICATION

- Adopted to outdoor level and vertical distribution.
- Suitable for connect with communication equipment.
- Long distance and local area network communication.

STANDARD

ANSI/TIA-568-C.3, ANSI/TIA/EIA-568-B.3, ISO/IEC 11801:2002, ANSI/ICEA 696, Telcordia (Bellcore) GR-20-CORE, ITU-T G.652D (Singlemode), ITU-T G.651 (Multimode), IEC 60332-1, IEC 60332-2& IEC 60332-3, IEC 60793/60794, ANSI/ICEA 596, EIA/TIA-455, UL, RoHS Compliant 2002/95/EC

Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
FTTX Strand Drop Wire Round	F-FTTX-SDR-01	FTTX Strand Drop Wire Round 1 Core	7.00
	F-FTTX-SDR-02	FTTX Strand Drop Wire Round 2 Core	8.00
	F-FTTX-SDR-04	FTTX Strand Drop Wire Round 4 Core	10.00
FTTX Strand Drop Wire Flat	F-FTTX-SDF-01	FTTX Strand Drop Wire Flat 1 Core	4.50
	F-FTTX-SDF-02	FTTX Strand Drop Wire Flat 2 Core	5.00
	F-FTTX-SDF-04	FTTX Strand Drop Wire Flat 4 Core	8.00
FTTX Strand Fig-8 Drop Wire Flat	F-FTTX-SDF8-01	FTTX Strand Fig-8 Drop Wire Flat 1 Core	3.00
	F-FTTX-SDF8-02	FTTX Strand Fig-8 Drop Wire Flat 2 Core	3.50
	F-FTTX-SDF8-04	FTTX Strand Fig-8 Drop Wire Flat 4 Core	4.50

FTTH Terminal Box Indoor

FTTH Terminal Box, 1 Port



FTTH Terminal Box, 2 Port



FTTH Terminal Box, 4 Port



Features

- Accommodation of 1, 2, 4 adapters
- Easy installation
- Suitable for SC sx and LC dx adapters
- Widely used in FTTH Network.
- Telecommunication Networks
- CATV Networks

Fiber Optic Cable-Coling Box, 15m



Features

- For 15m optical cable
- Size:150(L) x 120(W) x 37(H)mm

Multimedia Empty Metal Box



Features

- Colour:Light Grey
- It Can be fixed with 19Inch Panel and other telecommunication Equipment
- Size:H:550mm, W:540mm, D:200mm

Wall Mount Outdoor (Plastic)



2 Core



4 Core



8 Core



16 Core



24 Core



8 Core PLC



24 Core PLC


Features

- PP material used ensures the body strong and light.
- Easy installations: Ready for wall mount – installation kits provided
- Wet-proof, water-proof, dust-proof, anti-aging
- Space saving: Double-layer design for easier installation and maintenances

Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
FTTH Terminal Box Indoor	F-FTTH-BOX-01	FTTH Terminal Box, 1 Port	50.00
	F-FTTH-BOX-02	FTTH Terminal Box, 2 Port	60.00
	F-FTTH-BOX-04	FTTH Terminal Box, 4 Port	300.00
	F-FTTH-CL-Box	Fiber Optic Cable-Coling Box, 15m	500.00
Multimedia Empty Metal Box	F-FTTH-NB	Multimedia Empty Metal Box H:550mm, W:540mm, D:200mm	2,000.00
Wall Mount Outdoor (plastic)	F-WM-FTTH-02	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 2 Core	800.00
	F-WM-FTTH-04	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 4 Core	1,200.00
	F-WM-FTTH-08	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 8 Core	1,800.00
	F-WM-FTTH-08-PLC	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 8 Core with PLC	2,500.00
	F-WM-FTTH-16	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 16 Core	2,500.00
	F-WM-FTTH-16-PLC	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 16 Core with PLC	4,000.00
	F-WM-FTTH-24	Wall Mount Outdoor, Plastic, Fiber Optic Box For FTTH Cable for 24 Core	3,500.00

Blockless PLC Splitter

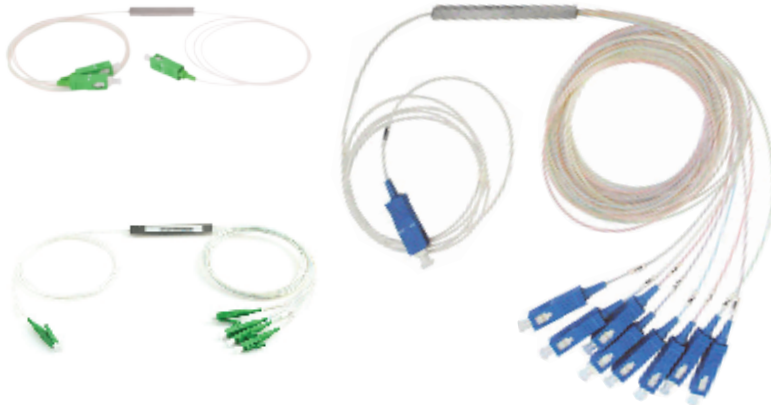


Features

- Free 1X2,4,8,16,32 PLC Splitter Sample for evaluation
- Quick Delivery on Trial Order or Bulk Order
- Plastic Packing Protection from Shipment
- High quality PLC design features a protective metal casing around the fibers
- PLC splitting mechanism
- 900µm loose tube fiber for easy stripping, splicing, or terminating

Characteristics

- Low insertion loss
- Low Polarization Dependent Loss
- Excellent Environmental Stability
- Excellent Mechanical Stability
- Telcordia GR-1221 and GR-1209
- Available in dual/three wavelength operation
- Available in 250um & 900um fiber.

Module Type PLC Splitter

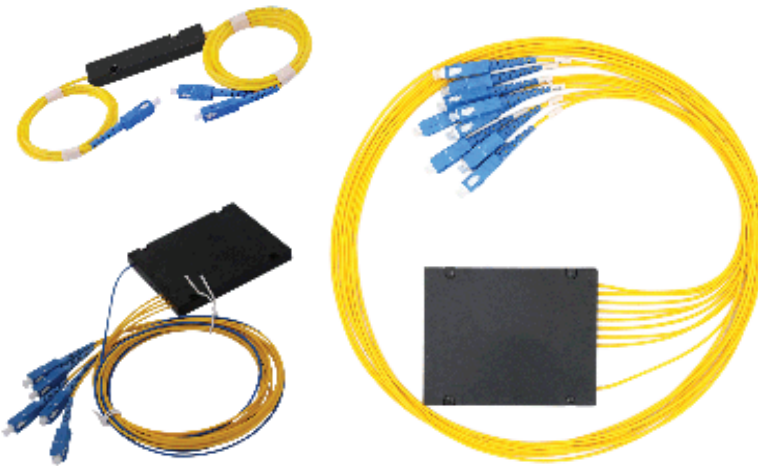

Features

- Free 1x2,4,8,16,32 Single mode PLC SM Splitter Sample for evaluation
- Quick Delivery on Trial Order or Bulk Order
- Well Made Premium Fiber Cable
- Plastic Packing Protection from Shipment
- 100% Money Refund or Replacement with Quality Problem

Characteristics

- Low insertion loss
- Low Polarization Dependent Loss
- Excellent Environmental Stability
- Excellent Mechanical Stability
- Telcordia GR-1221 and GR-1209
- Available in dual/three wavelength operation
- Available in 250um & 900um fiber, 2mm

Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Blockless PLC Splitter	F-BPLC-APC-SC-0102-01	Blockless PLC Splitter 1x2, SC/APC, 1m	224.00
	F-BPLC-APC-SC-0104-01	Blockless PLC Splitter 1x4, SC/APC, 1m	280.00
	F-BPLC-APC-SC-0108-01	Blockless PLC Splitter 1x8, SC/APC, 1m	350.00
	F-BPLC-APC-SC-0116-01	Blockless PLC Splitter 1x16, SC/APC, 1m	595.00
	F-BPLC-APC-SC-0132-01	Blockless PLC Splitter 1x32, SC/APC, 1m	1,190.00
	F-BPLC-APC-LC-0102-01	Blockless PLC Splitter 1x2, LC/APC, 1m	238.00
	F-BPLC-APC-LC-0104-01	Blockless PLC Splitter 1x4, LC/APC, 1m	294.00
	F-BPLC-APC-LC-0108-01	Blockless PLC Splitter 1x8, LC/APC, 1m	364.00
	F-BPLC-APC-LC-0116-01	Blockless PLC Splitter 1x16, LC/APC, 1m	630.00
Module Type PLC Splitter	F-BPLC-APC-LC-0132-01	Blockless PLC Splitter 1x32, LC/APC, 1m	1,260.00
	F-MPLC-APC-SC-0102-01	Module Type PLC Splitter 1x2, SC/APC, 2m	280.00
	F-MPLC-APC-SC-0104-01	Module Type PLC Splitter 1x4, SC/APC, 2m	350.00
	F-MPLC-APC-SC-0108-01	Module Type PLC Splitter 1x8, SC/APC, 2m	490.00
	F-MPLC-APC-SC-0116-01	Module Type PLC Splitter 1x16, SC/APC, 2m	770.00
	F-MPLC-APC-SC-0132-01	Module Type PLC Splitter 1x32, SC/APC, 2m	1,470.00
	F-MPLC-APC-LC-0102-01	Module Type PLC Splitter 1x2, LC/APC, 2m	336.00
	F-MPLC-APC-LC-0104-01	Module Type PLC Splitter 1x4, LC/APC, 2m	364.00
	F-MPLC-APC-LC-0108-01	Module Type PLC Splitter 1x8, LC/APC, 2m	490.00
F-MPLC-APC-LC-0116-01	Module Type PLC Splitter 1x16, LC/APC, 2m	805.00	
F-MPLC-APC-LC-0132-01	Module Type PLC Splitter 1x32, LC/APC, 2m	1,540.00	

Wall Mount Outdoor Metal

Wall Mount Outdoor FTTH Metal Box



Features

- With 3Pcs PG13.5 Cable Gland
- With 4Pcs Metal Mounting to fix on the wall
- To Output 24, 48 or 72 Branch FTTH Cable

96 Core Fiber Optic Cabinet (Splicing type)



Features

- Material : SMC (Flake mold Plastic Reinforced With Plate Unsaturated Polyester Polyester Glass Fiber), Which Is Formed After High Temperature And High-Pressure Molding.
- Waterproof IP Grade : IP66
- Environment Temperature : -40°C ~ +60°C
- adapter FC, SC, LC
- Using Life : >30Years

96 Core Fiber Optic Cabinet (PLC Tray type)



Features

- Material : SMC (Flake mold Plastic Reinforced With Plate Unsaturated Polyester Polyester Glass Fiber), Which Is Formed After High Temperature And High-Pressure Molding.
- Waterproof IP Grade : IP66
- Environment Temperature : -40°C ~ +60°C
- adapter FC, SC, LC
- Using Life : >30Years

PLC Splitter Tray SC type



Features

- Tamper-Proof Packaging
- Compact design
- Excellent Mechanical
- Good channel-to-channel uniformity
- High Reliability and Stability

Ordering Table

Code **XX** = SC, LC, FC

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Wall Mount Outdoor	F-WMB-24	Wall Mount Outdoor Fiber Optic Distribution Box 24 Core	2,500.00
	F-WMB-48	Wall Mount Outdoor Fiber Optic Distribution Box 48 Core	3,500.00
	F-WMB-72	Wall Mount Outdoor Fiber Optic Distribution Box 72 Core	4,500.00
	F-WMC-96-XX	Wall Mount Outdoor Fiber Optic Cabinet 96 Core(Splicing type)	10,000.00
	F-WMC-96-PLC	Wall Mount Outdoor Fiber Optic Cabinet 96 Core(PLC Tray type)	11,000.00
PLC Splitter Tray SC type	F-STB-08-PLC	1x8 PLC Splitter (SC UPC Type)	1,000.00
	F-STB-08-APLC	1x8 PLC Splitter (SC APC Type)	1,000.00
	F-STB-16-PLC	1x16 PLC Splitter (SC UPC Type)	2,000.00
	F-STB-16-APLC	1x16 PLC Splitter (SC APC Type)	2,000.00

Stand Fiber Optic Cabinet

Stand Fiber Optic Cabinet 96 Core



Splicing type

PLC Tray type

Features

- Material : SMC (Flake mold Plastic Reinforced With Plate Unsaturated Polyester Polyester Glass Fiber), Which Is Formed After High Temperature And High-Pressure Molding.
- Waterproof IP Grade : IP65
- Environment Temperature : -40°C ~ +60°C
- Using Life : >30Years

Stand Fiber Optic Cabinet 144 Core



Splicing type

PLC Tray type

Features

- Material : SMC (Flake mold Plastic Reinforced With Plate Unsaturated Polyester Polyester Glass Fiber), Which Is Formed After High Temperature And High-Pressure Molding.
- Waterproof IP Grade : IP65
- Environment Temperature : -40°C ~ +60°C
- Using Life : >30Years

Stand Fiber Optic Cabinet 288 Core



Splicing type

PLC Tray type

Features

- Material : SMC (Flake mold Plastic Reinforced With Plate Unsaturated Polyester Polyester Glass Fiber), Which Is Formed After High Temperature And High-Pressure Molding.
- Waterproof IP Grade : IP65
- Environment Temperature : -40°C ~ +60°C
- Using Life : >30Years

Ordering Table

Code **XX** = SC, LC, FC

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Stand Fiber Optic Cabinet	F-FRO-96-XX	Stand Fiber Optic Cabinet 96 Core(Splicing type)	12,000.00
	F-FRO-96-PLC	Stand Fiber Optic Cabinet 96 Core(PLC Tray type)	13,000.00
	F-FRO-144-XX	Stand Fiber Optic Cabinet 144 Core(Splicing type)	18,000.00
	F-FRO-144-PLC	Stand Fiber Optic Cabinet 144 Core(PLC Tray type)	19,000.00
	F-FRO-288-XX	Stand Fiber Optic Cabinet 288 Core(Splicing type)	25,000.00
	F-FRO-288-PLC	Stand Fiber Optic Cabinet 288 Core(PLC Tray type)	26,000.00

Patch Cord APC



SC-SC



SC-FC



FC-FC



Patch Cord Out door SC-SC APC


Features

- PP material used ensures the body strong and light.
- Wet-proof, water-proof, dust-proof, anti-aging
- Easy installations: Ready for wall mount – installation kits provided
- Space saving: Double-layer design for easier installation and maintenances

Pigtail APC



SC



FC

Features

- Metal material for the max strength.
- Easy installations: Ready for wall mount – installation kits provided.
- Ready for splitters: designed space for adding splitters.
- Space saving! Double-layer design for easier installation and maintenances

Fast Connector



SC Fast Connector UPC



SC Fast Connector APC

Features

- SC FiberOptic Fast Connector
- Suit For FTTH Cable

Aapter APC



SC Adapter Simplex , APC, SM



SC Adapter Duplex , APC, SM



FC Adapter APC

Features

- Low insertional loss and back reflection loss
- High prcision alignment
- NTT-MU hardware compatibility, NTT & JIS compliance

Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Patch Cord APC	F-APC-SCSC9-3-DX	Patch Cord SC-SC, APC, SM 9/125um, Duplex, 3M	250.00
	F-APC-SCFC9-3-DX	Patch Cord SC-FC, APC, SM 9/125um, Duplex, 3M	250.00
	F-APC-FCFC9-3-DX	Patch Cord FC-FC, APC, SM 9/125um, Duplex, 3M	250.00
Patch Cord out door APC	F-APC-OSCSC9-3-DX	Patch Cord Out door SC-SC, APC, SM 9/125um, Duplex, 3M	300.00
	F-APC-OSCSC9-5-DX	Patch Cord Out door SC-SC, APC, SM 9/125um, Duplex, 5M	340.00
	F-APC-OSCSC9-10-DX	Patch Cord Out door SC-SC, APC, SM 9/125um, Duplex, 10M	440.00
	F-APC-OSCSC9-15-DX	Patch Cord Out door SC-SC, APC, SM 9/125um, Duplex, 15M	540.00
	F-APC-OSCSC9-20-DX	Patch Cord Out door SC-SC, APC, SM 9/125um, Duplex, 20M	640.00
	F-APC-OSCSC9-25-DX	Patch Cord Out door SC-SC, APC, SM 9/125um, Duplex, 25M	740.00
Pigtail APC	F-PT-APCSC9-0.9mm/2mm	Pigtail SC, APC, SM 9/125um (900um Jacket)/ (2mm Jacket)	60.00
	F-PT-APCFC9-0.9mm/2mm	Pigtail FC, APC, SM 9/125um (900um Jacket)/ (2mm Jacket)	60.00
Adapter APC	F-AD-APCSC9-SX	SC Adapter Simplex , APC, SM	40.00
	F-AD-APCSC9-DX	SC Adapter Duplex , APC, SM	80.00
	F-AD-APCFC9	FC Adapter APC	40.00
Fast Connector	F-FC-SC-UPC	SC Fast Connector UPC	50.00
	F-FC-SC-APC	SC Fast Connector APC	50.00

Additional

- Patch Cord Out door APC + 20.- Per M.

FTTH Closure

F.O. Splice Closure for FTTH



Features

- 1 Core Fiber Optical Cable Splicing Protector
- For Simplex SC adaptor

F.O. Splice Closure for FTTH



Features

Unscrew 4 bolts and open the closure. The optical fiber cable or patch cords can be inputted in FOCS from two holes. Determine the length of fiber cable, to be stripped and fixed inside the FOCS. After stripping and fusion, seal the cable inputs with sealing tape. Screw 4 bolts.

F.O. Splice Closure for FTTH up 16-24 subscribers and 96 splicing points



Features

- water-proof design with IP-68
- Integrated with flap-up splice cassette and adaptor holder
- All stainless metal plate and anti-rusting bolts, nuts.
- Suitable for the fusion splice or mechanical splice
- 2 pcs of 1x8, 1x16 or 2x16 splitter can be installed as an option
- 16 ports cable entrance for drop cable, 24 adapter for drop cable patching

F.O. Splice Closure for FTTH 8 Subscribers PLC Splitter



Features

- It made of plastic , perfect appearance.
- Modular splitter design, it can install 1x8,1x4,1x2 modular splitter.
- Easy to open and close, not need any tools
- Perfect fiber route design to ensure bend radius of fibers.
- Special design for water-proof,it can be IP 55.

F.O. Splice Closure for FTTH 16 Subscribers PLC Splitter



Features

- It made of plastic , perfect appearance.
- Modular splitter design, it can install 1x8,1x4,1x2
- Easy to open and close, not need any tools
- Perfect fiber route design to ensure bend radius of fibers.
- Special design for water-proof,it can be IP 65.
- The closure has two space, each one is separately, operating independently.

Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
FTTH Closure	F-CS01-FTTH	F.O. Splice Closure for FTTH ,01 Core	200.00
	F-CS04-FTTH	F.O. Splice Closure for FTTH ,04 Core	500.00
	F-CS-FTTH	F.O. Splice Closure for FTTH up 16-24 subscribers and 96 splicing points	2,400.00
	F-CS02PLC-FTTH	F.O. Splice Closure for FTTH 2 Subscribers PLC Splitter	1,500.00
	F-CS04PLC-FTTH	F.O. Splice Closure for FTTH 4 Subscribers PLC Splitter	2,000.00
	F-CS08PLC-FTTH	F.O. Splice Closure for FTTH 8 Subscribers PLC Splitter	2,500.00
	F-CS16PLC-FTTH	F.O. Splice Closure for FTTH 16 Subscribers PLC Splitter	3,500.00

บริษัท โฟคคอมม (ประเทศไทย) จำกัด

12 ซอยสุขุมวิท 5 ซอย 5 แยก 3 แขวงท่าแร้ง เขตบางเขน กรุงเทพฯ 10220 โทร. 063-391-5262 โทร. 02-557-6451 แฟกซ์. 02-557-6452

www.focomm-cabling.com