

# UTP



- UTP Cable Indoor
- UTP Cable Outdoor
- UTP Cable Outdoor Drop Wrie
- Patch Panel
- Patch Cord
- Keystone Jack
- Modular Plug and Boot
- Face Plate, Plug Boot

## LAN Cable Indoor


### CAT 6A




**L-UI6A-SJ-FTP**  
Cat6A F/UTP Cable 23AWG, 650MHz, LSZH

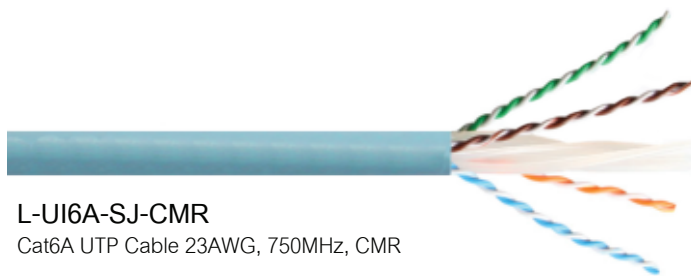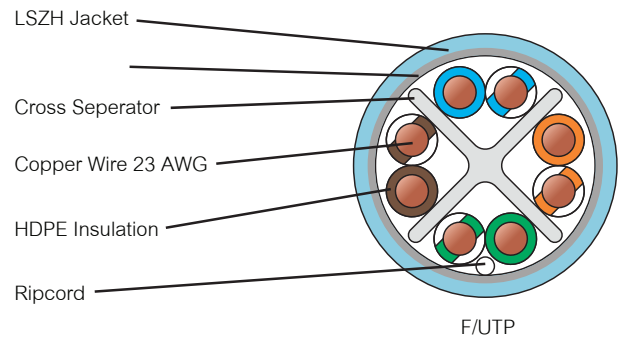


**L-UI6A-SJ-CMR**  
Cat6A UTP Cable 23AWG, 750MHz, CMR

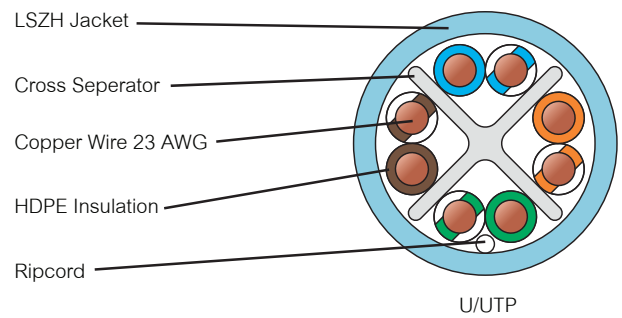


### CAT 6

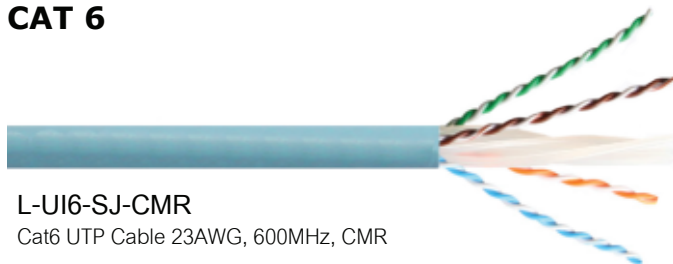


**L-UI6-SJ-CMR**  
Cat6 UTP Cable 23AWG, 600MHz, CMR

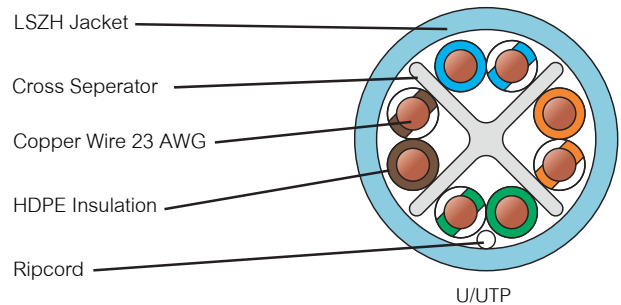

### CAT 5e

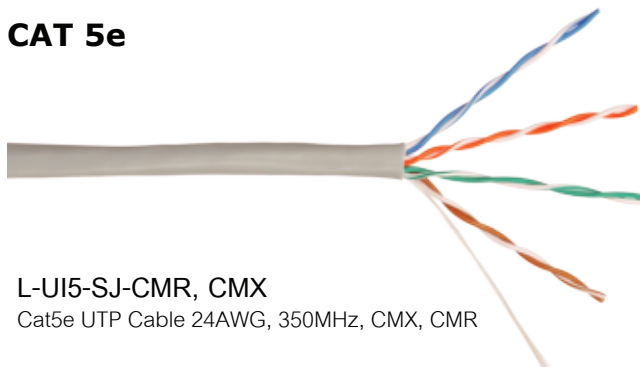

**L-UI5-SJ-CMR, CMX**  
Cat5e UTP Cable 24AWG, 350MHz, CMX, CMR

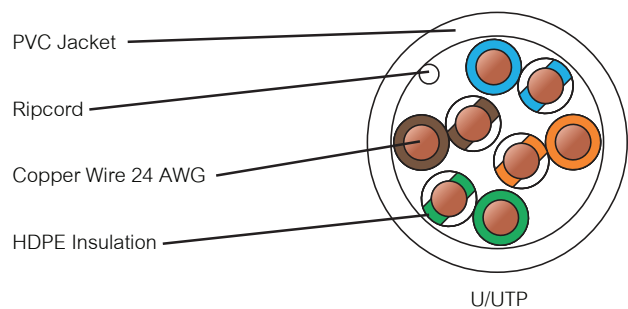

## Specification


Part number	L-UI6A-SJ-FTP-LSZH	L-UI6A-SJ-CMR	L-UI6-SJ-CMR	L-UI5-SJ-CMR / CMX
Category	6A		6	5e
Bandwidth (MHz)	650 MHz	750 MHz	600 MHz	350 MHz
Type of cable	F/UTP	U/UTP	U/UTP	
Number of pairs	4		4	
Conductor material	Copper		Copper	
Type of conductor	Solid		Solid	
Diameter of conductors	23AWG 0.58 ± 0.1 mm	23AWG 0.58 ± 0.1 mm	23AWG 0.55 ± 0.01 mm	24AWG 0.5 ± 0.01 mm
Material of conductor insulation	High Density Polyethylene (HDPE)		High Density Polyethylene (HDPE)	
Thickness of conductor insulation	0.310 ± 0.02 mm	0.326 ± 0.02 mm	0.21 ± 0.02 mm	0.20 ± 0.02 mm
Diameter of wire insulation	1.4 ± 0.05 mm	1.1 ± 0.05 mm	0.99 ± 0.05 mm	0.90 ± 0.05 mm
Material of ourter jacket	LSZH	PVC/CMR	PVC/CMR	PVC/CMR / PVC/CMX
Area of application	Indoor		Indoor	
Jacket Thickness	0.7 ± 0.05 mm		0.6 ± 0.05 mm	0.6 ± 0.05 mm
Outer diameter of jacket	7.4 ± 0.3 mm	7.1 ± 0.3 mm	6 ± 0.3 mm	5.1 ± 0.3 mm
Jacket color	Light Blue		Light Blue	White
Screen design	PES/Al foil, 100% coverage, paved with a solid drain wire	-	-	-
Protective film	-		-	
Ripcord	Yes		Yes	
Mass density (kg) per unit length (km)	57.8 ± 0.5 kg/km	50 ± 0.5 kg/km	40.2 ± 0.5 kg/km	29.8 ± 0.5 kg/km / 28.7 ± 0.5 kg/km
Min. bending radius during cabling	≥ 4x OD		≥ 4x OD	
Min. bending radius during opeartion	≥ 8x OD		≥ 8x OD	
Max. tensile strength, N	Max 100 N		Max 100 N	
Characteristic impedance, ohms	100 ± 15 ohms at 20°C		100 ± 15 ohms at 20°C	
Nominal velocity of propagation (NVP)	0.78 ± 0.1		0.69 ± 0.1	
Max. conductor resistance(DC)	≤ 82 ohms/km	≤ 82 ohms/km	≤ 89 ohms/km	≤ 94 ohms/km / ≤ 93.8 ohms/km
Compliance	ISO/IEC 11801, EN 50173 and ANSI/TIA-568-C.2, RoHS, REACH			
Application	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 10GBASE-T (55 M) ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive			
Temperature range	Storage -20 to +60°C. Installation from 0 to +50°C. Operating from -20 to +60°C			

## Ordering Table

Part Number	Pairs	Category	Type	Usage, Jacket	Color	Length, m	Package	PRICE
L-UI6A-SJ-FTP	4	6A	U/UTP	Indoor,FTP	Light Blue	305	Pull-out box	6,500.00
L-UI6A-SJ-CMR	4	6A	F/UTP	Indoor,CMR	Light Blue	305	Pull-out box	5,000.00
L-UI6-SJ-LSZH	4	6	U/UTP	Indoor,LSZH	Light Blue	305	Pull-out box	4,500.00
L-UI6-SJ-CMR	4	6	U/UTP	Indoor,CMR	Light Blue	305	Pull-out box	3,800.00
L-UI5-SJ-CMR	4	5e	U/UTP	Indoor,CMR	White	305	Pull-out box	2,700.00
L-UI5-SJ-CMX	4	5e	U/UTP	Indoor,CMX	White	305	Pull-out box	2,600.00



## LAN Cable Outdoor

### CAT 6

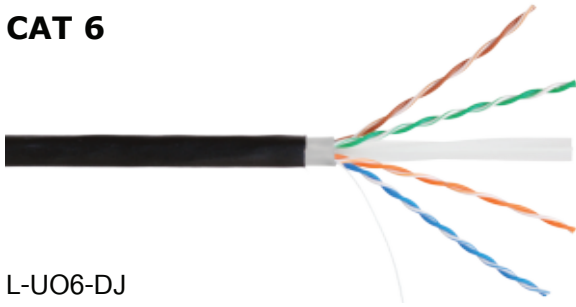


L-UO6-DJ

Cat6 UTP Cable, Outdoor Double Jacket, 23AWG, 600MHz

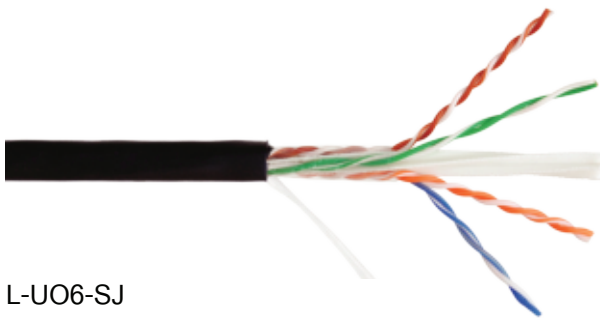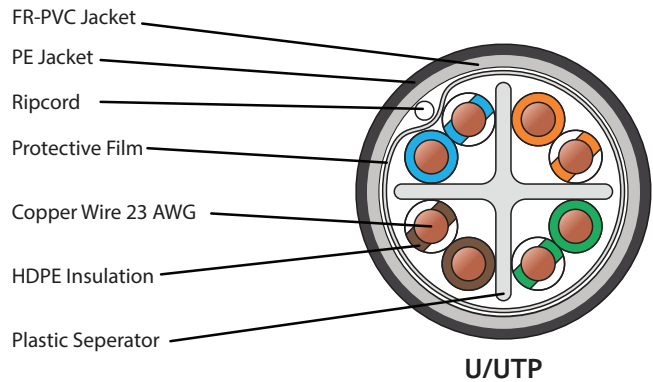


L-UO6-SJ

Cat6 UTP Cable, Outdoor Single Jacket, 23AWG, 600MHz


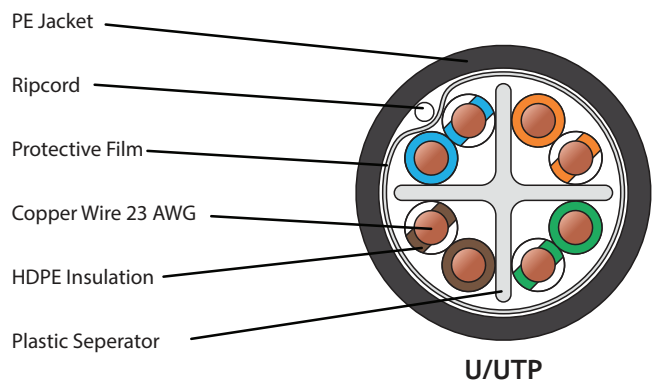


### CAT 5e

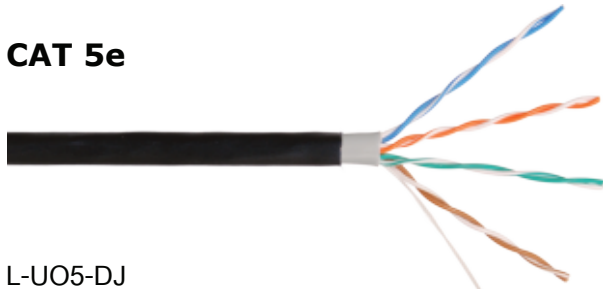


L-UO5-DJ

Cat5e UTP Cable, Outdoor Double Jacket, 24AWG, 350MHz

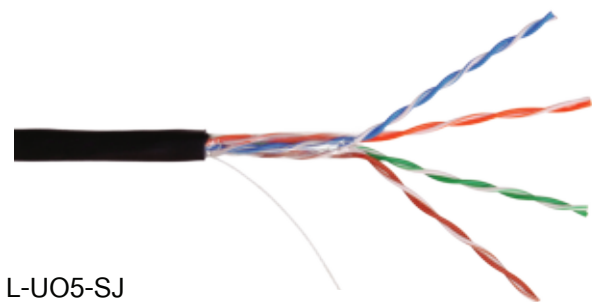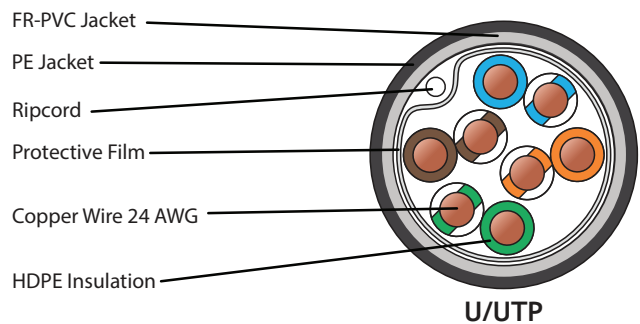

L-UO5-SJ

Cat5e UTP Cable, Outdoor Single Jacket, 24AWG, 350MHz

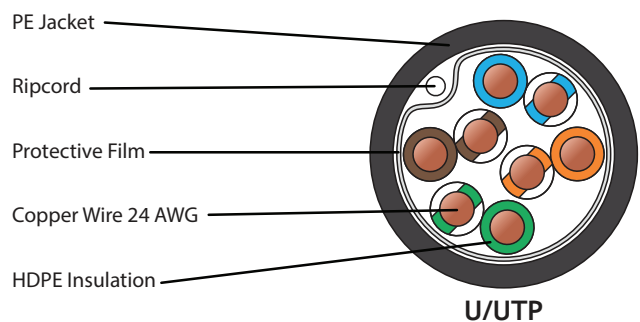

## Specification

Part number	L-UO6-DJ	L-UO6-SJ	L-UO5-DJ	L-UO5-SJ
Category	6		5e	
Bandwidth (MHz)	600 MHz		350 MHz	
Type of cable	U/UTP		U/UTP	
Number of pairs	4			
Conductor material	Copper			
Type of conductor	Solid			
Diameter of conductors	0.57 ± 0.01 mm		0.50 ± 0.01 mm	
Material of conductor insulation	High Density Polyethylene (HDPE)			
Thickness of conductor insulation	0.25 ± 0.02 mm	0.25 ± 0.02 mm	0.25 ± 0.02 mm	0.2 ± 0.02 mm
Diameter of wire insulation	1.09 ± 0.05 mm	1.09 ± 0.05 mm	1 ± 0.05 mm	0.9 ± 0.05 mm
Outer jacket Material	PE			
Inner Jacket material	FR-PVC	-	FR-PVC	-
Usage	Outdoor			
Out Jacket Thickness	0.6 ± 0.05 mm		0.55 ± 0.05 mm	
Inner Jacket Thickness	0.6 mm		0.6 mm	
Outer diameter of jacket	6.8 ± 0.3 mm	6.1 ± 0.3 mm	6.6 ± 0.3 mm	5.3 ± 0.3 mm
Jacket color	Black			
Protective film	Polyester			
Ripcord	Yes			
Mass density (kg) per unit length (km)	43.1 ± 0.5 kg/km	37.8 ± 0.5 kg/km	35.1 ± 0.5 kg/km	26.7 ± 0.5 kg/km
Min. bending radius during cabling	≥ 4x OD			
Min. bending radius during operation	≥ 8x OD			
Max. tensile strength, N	Max 100 N			
Characteristic impedance, ohms	100 ± 15 ohms at 20°C			
Nominal velocity of propagation (NVP)	0.70 ± 0.1	0.69 ± 0.1	0.69 ± 0.1	0.69 ± 0.1
Max. conductor resistance(DC)	95 ohms/km			
Compliance	ISO/IEC 11801, EN 50173 and ANSI/TIA-568-C.2, RoHS, REACH			
Application	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 10GBASE-T (55 M) ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive			
Temperature range	Storage -60 to +60°C. Installation from 10 to +50°C. Operating from -60 to +60°C			

## Ordering Table

Part Number	Pairs	Category	Type	Usage, Jacket	Color	Length, m	Package	PRICE
L-UO6-DJ	4	6	U/UTP	Outdoor,PE	Black	305	Pull-out box	5,200.00
L-UO6-SJ	4	6	U/UTP	Outdoor,PE	Black	305	Pull-out box	4,800.00
L-UO5-DJ	4	5e	U/UTP	Outdoor,PE	Black	305	Pull-out box	3,800.00
L-UO5-SJ	4	5e	U/UTP	Outdoor,PE	Black	305	Pull-out box	3,500.00

# UTP Cable Product




## LAN Cable Outdoor Drop Wire

### CAT 6




L-UO6-DW-DJ

Cat6 UTP Cable, Outdoor Double Jacket, Drop Wire, 23AWG, 600MHz

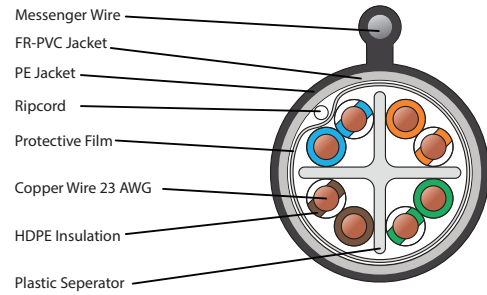


L-UO6-DW2P-DJ

Cat6 UTP Cable, Outdoor Drop Wire with 2Power, Double Jacket, 23AWG, 600MHz

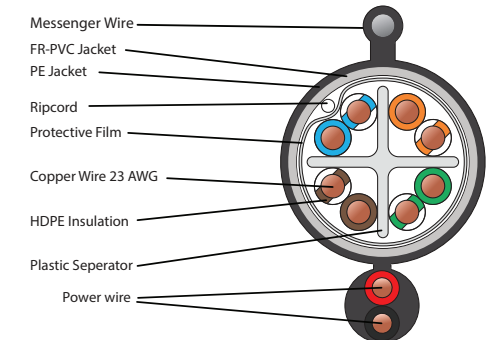


### CAT 5e

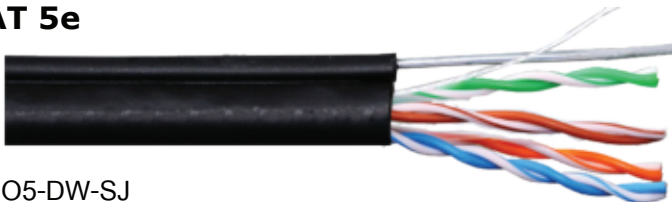


L-UO5-DW-SJ

Cat5e UTP Cable, Outdoor Drop Wire, Single Jacket, 24AWG, 350MHz

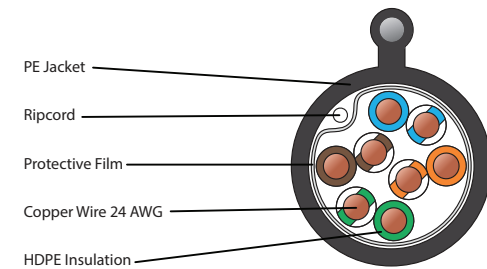


L-UO5-DW-DJ

Cat5e UTP Cable, Outdoor Drop Wire, Double Jacket, 24AWG, 350MHz

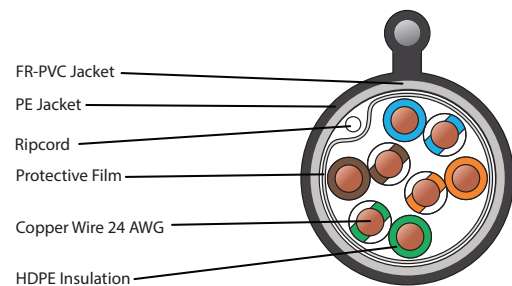

L-UO5-DW2P-DJ

Cat5e UTP Cable, Outdoor Drop Wire with 2Power, Double Jacket, 24AWG, 350MHz

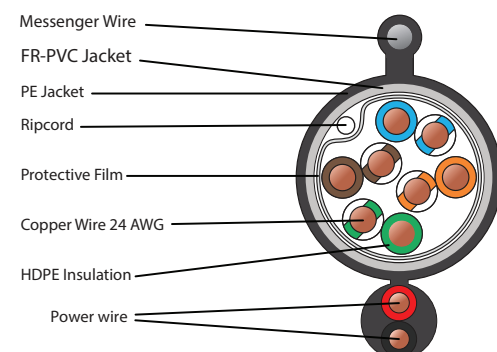

## Specification

Part number	L-UO6-DW-DJ	L-UO6-DW2P-DJ	L-UO5-DW-SJ	L-UO5-DW-DJ	L-UO5-DW2P-DJ
Category	6		5e		
Bandwidth (MHz)	600 MHz		350 MHz		
Type of cable	U/UTP		U/UTP		
Number of pairs	4		4		
Conductor material	Copper		Copper		
Type of conductor	Solid		Solid		
Diameter of conductors	0.57 ± 0.01 mm		0.5mm		
Messenger Wire	1.3 mm.		1.3 mm.		
Power Wire	2*9*0.38 mm CCA		2*9*0.38 mm CCA		
Material of conductor insulation	High Density Polyethylene (HDPE)		High Density Polyethylene (HDPE)		
Diameter of wire insulation	1.09 ± 0.05 mm	1.09 ± 0.05 mm	1 ± 0.05 mm	0.9 ± 0.05 mm	0.90±0.5 mm.
Outer jacket Material	PE		PE		
Inner Jacket material	FR-PVC		-	FR-PVC	
Usage	Outdoor		Outdoor		
Inner Jacket Thickness	6.0 mm	6.0 mm	-	5.1 mm	5.1 mm
Outer diameter of jacket	7.4 ± 0.3 mm	6.5 ± 0.3 mm	5.5 ± 0.3 mm	6.3 ± 0.3 mm	5.5 ± 0.3 mm
Jacket color	Black		Black		
Protective film	Polyester		Polyester		
Ripcord	Yes		Yes		
Min. bending radius during cabling	≥ 4x OD		≥ 4x OD		
Min. bending radius during operation	≥ 8x OD		≥ 8x OD		
Max. tensile strength, N	Max 100 N		Max 100 N		
Characteristic impedance, ohms	100 ± 15 ohms at 20°C		100 ± 15 ohms at 20°C		
Max. conductor resistance(DC)	95 ohms/km				
Compliance	ISO/IEC 11801, EN 50173 and ANSI/TIA-568-C.2, RoHS, REACH				
Application	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 10GBASE-T (55 M)ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive				
Temperature range	Storage -60 to +60°C. Installation from 10 to +50°C. Operating from -60 to +60°C				

## Ordering Table

Part Number	Pairs	Category	Type	Usage, Jacket	Color	Length, m	Package	PRICE
L-UO6-DW2P-DJ	4	6	U/UTP	Outdoor,PE	Black	305	Pull-out box	6,500.00
L-UO6-DW-DJ	4	6	U/UTP	Outdoor,PE	Black	305	Pull-out box	5,500.00
L-UO5-DW2P-DJ	4	5e	U/UTP	Outdoor,PE	Black	305	Pull-out box	5,500.00
L-UO5-DW-DJ	4	5e	U/UTP	Outdoor,PE	Black	305	Pull-out box	4,200.00
L-UO5-DW-SJ	4	5e	U/UTP	Outdoor,PE	Black	305	Pull-out box	3,800.00



## Patch Panel

### Patch Panel CAT5E (24 port)



#### 19" 1U UTP Patch Panel CAT5E

- Compatible both T568A and T568B wiring schemes.
- Designed to fit all standard 19" racks and cabinets.
- Contact Gold Plating 50U".
- Only Accept RJ-45 8P8C PLUG.
- According To: ANSI / TIA-568-C.2, ISO / IEC 11801 2nd Edition, IEC 60603-7.

### Patch Panel CAT6 (24 port)



#### 19" 1U UTP Patch Panel CAT6

- Compatible both T568A and T568B wiring schemes.
- Designed to fit all standard 19" racks and cabinets.
- Contact Gold Plating 50U".
- Only Accept RJ-45 8P8C PLUG.
- According To: ANSI / TIA-568-C.2, ISO / IEC 11801 2nd Edition, IEC 60603-7.

## Patch Panel Unload



#### 19" 1U UTP Patch Panel Unload, Blank 24 ports

- Improving accessibility: termination field is closer
  - toinstaller for easier termination
  - Low profile: offering more aisle space in small closets
- Designed to easily route cables into vertical cablemanagers.



#### 19" 1U UTP Patch Panel Unload,1U 24PORT FTP

- 24 PORT in one unit height.
- With gourd wire.
- Available to fit with cat5e, 6, 6A RJ45 keystone Jacks.
- Available to fit with cat5e, 6, 6A RJ45 keystone Jacks.

### Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Patch Panel	L-PP-U5-24	19" 1U UTP Patch Panel CAT5E, 24 Ports, Toolless, With back bar	1,560.00
	L-PP-U6-24	19" 1U UTP Patch Panel CAT6, 24 Ports, Toolless, With back bar	2,040.00
	L-PP-U-UL-24	19" 1U UTP Patch Panel Unload, Blank 24 ports for Keystone Jack, With back bar	720.00
	L-PP-U-UL-24-FTP	19" 1U UTP Patch Panel Unload,1U 24PORT FTP Blank Patch Panel, With back bar	1,000.00



# Accessories For UTP Cable Product



## Patch Cord CAT5E



Colors



### Features

- RJ45 Gold Plated: FU" ~ 50U" Available.
- Cable Conductor: Bare Copper 24AWG.
- Cable Jacket: PVC or LSZH Available.
- UL Certified & ETL Verified.

## Patch Cord CAT5E Outdoor



Colors



### Features

- RJ45 Gold Plated: FU" ~ 50U" Available.
- Cable Conductor: Bare Copper 24AWG.
- Cable Jacket: PE or LSZH Available.
- UL Certified & ETL Verified.

## Patch Cord CAT6



Colors



### Features

- RJ45 Gold Plated: FU" ~ 50U" Available.
- Cable Conductor: Bare Copper 23AWG.
- Cable Jacket: PVC or LSZH Available.
- UL Certified, ETL & DELTA Verified.

## Patch Cord CAT6 Outdoor



Colors



### Features

- RJ45 Gold Plated: FU" ~ 50U" Available.
- Cable Conductor: Bare Copper 23AWG.
- Cable Jacket: PE or LSZH Available.
- UL Certified, ETL & DELTA Verified.

## Patch Cord CAT6A



Colors



### Features

- RJ45 Gold Plated: FU" ~ 50U" Available.
- Cable Conductor: Bare Copper 26AWG.
- Cable Jacket: PVC or LSZH Available.
- UL Certified & DELTA Verified.

## Patch Cord CAT6A (STP)



Colors



### Features

- RJ45 Gold Plated: FU" ~ 50U" Available.
- Cable Conductor: Bare Copper 26AWG.
- Cable Jacket: PVC or LSZH Available.
- UL Certified, ETL & DELTA Verified.

## Ordering Table

Color Code X = R W Y G B BB

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Patch Cord CAT5E	L-PC-U5-1-X	Cat5e Patch Cord RJ45 to RJ45 1M	70.00
	L-PC-U5-2-X	Cat5e Patch Cord RJ45 to RJ45 2M	80.00
	L-PC-U5-3-X	Cat5e Patch Cord RJ45 to RJ45 3M	90.00
Patch Cord CAT5E Outdoor	L-PC-UO5-1-X	Cat5e Patch Cord, Outdoor, RJ45 to RJ45 1M	80.00
	L-PC-UO5-2-X	Cat5e Patch Cord, Outdoor, RJ45 to RJ45 2M	90.00
	L-PC-UO5-3-X	Cat5e Patch Cord, Outdoor, RJ45 to RJ45 3M	100.00
Patch Cord CAT6	L-PC-U6-1-X	Cat6 Patch Cord RJ45 to RJ45 1M	90.00
	L-PC-U6-2-X	Cat6 Patch Cord RJ45 to RJ45 2M	100.00
	L-PC-U6-3-X	Cat6 Patch Cord RJ45 to RJ45 3M	110.00
Patch Cord CAT6 Outdoor	L-PC-UO6-1-X	Cat6 Patch Cord, Outdoor, RJ45 to RJ45 1M	110.00
	L-PC-UO6-2-X	Cat6 Patch Cord, Outdoor, RJ45 to RJ45 2M	130.00
	L-PC-UO6-3-X	Cat6 Patch Cord, Outdoor, RJ45 to RJ45 3M	150.00
Patch Cord CAT6A	L-PC-US6A-1-X	Cat6A Patch Cord Slim, RJ45 to RJ45 1M	150.00
	L-PC-US6A-2-X	Cat6A Patch Cord Slim, RJ45 to RJ45 2M	200.00
	L-PC-US6A-3-X	Cat6A Patch Cord Slim, RJ45 to RJ45 3M	250.00
Patch Cord CAT6A (STP)	L-PC-US6A-1-X	Cat6A STP Patch Cord Slim, RJ45 to RJ45 1M	200.00
	L-PC-US6A-2-X	Cat6A STP Patch Cord Slim, RJ45 to RJ45 2M	250.00
	L-PC-US6A-3-X	Cat6A STP Patch Cord Slim, RJ45 to RJ45 3M	300.00

## Additional

- Patch Cord CAT5E + 10.- Per M.
- Patch Cord CAT5E Outdoor + 10.- Per M.
- Patch Cord CAT6 + 10.- Per M.
- Patch Cord CAT6 Outdoor + 10.- Per M.
- Patch Cord CAT6A + 50.- Per M.
- Patch Cord CAT6A (STP) + 50.- Per M.

## Keystone Jack

### RJ45 Keystone Jack



CAT5E Toolless Type,  
90 Degree




UTP CAT6 Toolless Type,  
90 Degree



UTP CAT6A Toolless Type,  
180 Degree



UTP CAT6A FTP, Toolless  
Type, 180 Degree



Connection Box, CAT5E



Connection Box, CAT6

### Multimedia Jack



HDMI Keystone Jack



Jack USB 2.0 A Female to A Female



Coaxial TV



Module BNC Female to Female



Fiber Optic ST Adapter



Fiber Optic SC Adapter



Modular RCA female to female



Banana Jack Black Ring



Banana Jack Red Ring



3.5mm Stereo Female to Female



Blank Insert for Wall Plate



### Ordering Table

Standard : ISO / IEC 11801 and the ANSI/TIA-568-C.2.

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
RJ45 Keystone Jack	L-KJ-U5	CAT5E Keystone Jack Toolless Type, 90 Degree	55.00
	L-KJ-U6	UTP CAT6 Keystone Jack Toolless Type, 90 Degree	68.00
	L-KJ-U6A	UTP CAT6A Keystone Jack Toolless Type, 180 Degree	100.00
	L-KJ-U6A-FTP	UTP CAT6A FTP, Keystone Jack Toolless Type, 180 Degree	150.00
	L-CB-U5	Connection Box, CAT5E	100.00
	L-CB-U6	Connection Box, CAT6	150.00
Multimedia Jack	L-KJ-HDMI	HDMI Keystone Jack	100.00
	L-KJ-USB2.0	USB Keystone Jack USB 2.0 A Female to A Female	68.00
	L-KJ-CATV	Coaxial TV Keystone Jack	55.00
	L-KJ-BNC-FF	Keystone Jack Module BNC Female to Female	60.00
	L-KJ-FO-ST	Fiber Optic ST Adapter Keystone Jack	200.00
	L-KJ-FO-SC	Fiber Optic SC Adapter Keystone Jack	200.00
	L-KJ-RCA-FF	Keystone Jack Modular RCA female to female (Gold Plated )	60.00
	L-KJ-BJ-BR	Keystone Jack Banana Jack Black Ring	55.00
L-KJ-BJ-RR	Keystone Jack Banana Jack Red Ring	55.00	
L-KJ-ST-FF	Keystone Jack 3.5mm Stereo Female to Female	60.00	
L-KJ-BK	Blank Insert for Wall Plate	15.00	

## Modular Plug and Boot

### RJ45 Modular Plug

#### CAT5e



#### Features

- For solid cable

#### CAT6



#### Features

- For solid cable

#### CAT6 STP



#### Features

- For solid cable

#### CAT6A STP



#### Features

- 8P8C Modular Plug, UP:6pin, Down:2pin, Three-piece suit

### EZ RJ45 Modular Plug

#### CAT5E/CAT6



#### Features

- Clear polycarbonate
- Unshielded
- Gold-plated contacts
- Round cable entry

### Tooless Modular Plug

#### CAT6



#### Features

- Clear polycarbonate
- Unshielded
- Gold-plated contacts
- Round cable entry

#### CAT6 STP/CAT6A STP



#### Features

- Clear polycarbonate
- Unshielded
- Gold-plated contacts
- Round cable entry

### RJ45 Boots

#### Plug Strain Relief Boot



#### Features

- Color: Transparent
- Package: 100pcs Per Bag
- Application: For RJ45 Male Connectors

#### Plug Boot Colors



#### Colors



### Ordering Table

Color Code **XX** = R W Y G B

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
RJ45 Modular Plug	L-MP-U5	UTP CAT5E 8P8C Modular Plug	5.00
	L-MP-U6	UTP CAT6 8P8C Modular Plug	9.00
	L-MP-U6-STP	UTP CAT6 8P8C Modular Plug, STP	15.00
	L-MP-U6A-STP	UTP CAT6A STP, 8P8C Modular Plug, UP:6pin, Down:2pin, Three-piece suit	25.00
EZ RJ45 Modular Plug	L-EZMP-U5	EZ UTP CAT5E 8P8C Modular Plug	6.00
	L-EZMP-U6/A	EZ UTP CAT6 8P8C Modular Plug	11.00
Tooless Modular Plug	L-TL-MP-U6	Tooless Modular Plug, CAT6	100.00
	L-TL-MP-U6-STP	Tooless Modular Plug, CAT6, STP	150.00
	L-TL-MP-U6A-STP	Tooless Modular Plug, CAT6A, STP	200.00
RJ45 Boots	L-PB-O	Plug Strain Relief Boot	4.80
	L-PB-XX	Plug Boot Colors	4.00

## Face Plate



### Features

- Color: White / Ivory Available
- 1, 2, 4, Port Available

## Face Plate With Label



### Features

- Color: White / Ivory Available
- 1, 2, 4, Port Available

## Wall Mount Box



### Features

- Simple installation and termination.
- With Twin Adhesive x 1pc, Screw x 2pcs.

## Surface Box



### Features

- Single Surface Box Empty (With out RJ45 Jack)
- Dual Surface Box Empty (With out RJ45 Jack)

## Floor Socket



### Features

- Floor Socket, 1, 2 pcs Universal Socket

## Ordering Table

PRODUCT	PART NUMBER	DESCRIPTION	PRICE
Face Plate & Box	L-FP-01	Face Plate, 1Port Size 70x115mm	18.00
	L-FP-02	Face Plate, 2Port Size 70x115mm	18.00
	L-FP-04	Face Plate, 4Port Size 70x115mm	29.00
Face Plate With Label	L-FPL-01	Face Plate, 1Port with label Size 70x115mm	22.00
	L-FPL-02	Face Plate, 2Port with label Size 70x115mm	25.00
	L-FPL-04	Face Plate, 4Port with label Size 70x115mm	30.00
Box	L-Box-01	Wall Mount Box	24.00
Surface Box	L-SFB-01	Surface Box 1 Port	40.00
	L-SFB-02	Surface Box 2 Port	50.00
Floor Socket	L-FS01-PRJ	Floor Socket, 1pcs Universal Socket and RJ45 Jack	1,000.00
	L-FS02-PRJ	Floor Socket, 2pcs Universal Socket and RJ45 Jack	1,200.00