

FIBER OPTIC CABLE PRODUCT

SINGLE TUBE, INDOOR/OUTDOOR CABLE SM/MM



PRODUCT DESCRIPTION


- Low attenuation, dispersion and special control of excess fiber length ensure excellent mechanical and envelopment properties.
- Filling compound and water block material validly prevent water penetration.

APPLICATION

- Optical transmission cables for transmission equipment, data processing equipment also suitable for general cabling.
- Laying method : Conduit, aerial, direct buried, shelf
- Temperature range -40 °C - +70 °C

STANDARD

- ATM, FDDI, FTTX, Fiber Channel, CATV, Communication
- ISO/IEC 11801:2007, ISO/IEC 11801:2011 (Ed.2.2)
- ANSI/TIA/EIA-568-B.3, ANSI/TIA-568-C.3, ANSI/TIA-568.3-D, ANSI/ICEA 640
- Telcordia (Bellcore) GR-20 CORE, GR-409-CORE
- ANSI/ICEA 596, ICEA 696, IEC 61034-2, IEC 60754-2, IEC 60793, IEC 60794-1-2
- ITU G.652D, ITU-TG 657A2
- TIA/EIA-598-C (Rev. TIA/EIA-598-A), EIA-359-A.
- IEEE 802.3z, IEEE 802.3ae, IEEE 802.3 (LAN, Ethernet Fast Ethernet, Gigabit Ethernet and 10 Gigabit Ethernet 40-100 Gbps)
- RoHS compliant
- TIS 2165-2561
- Made in Thailand : MiT

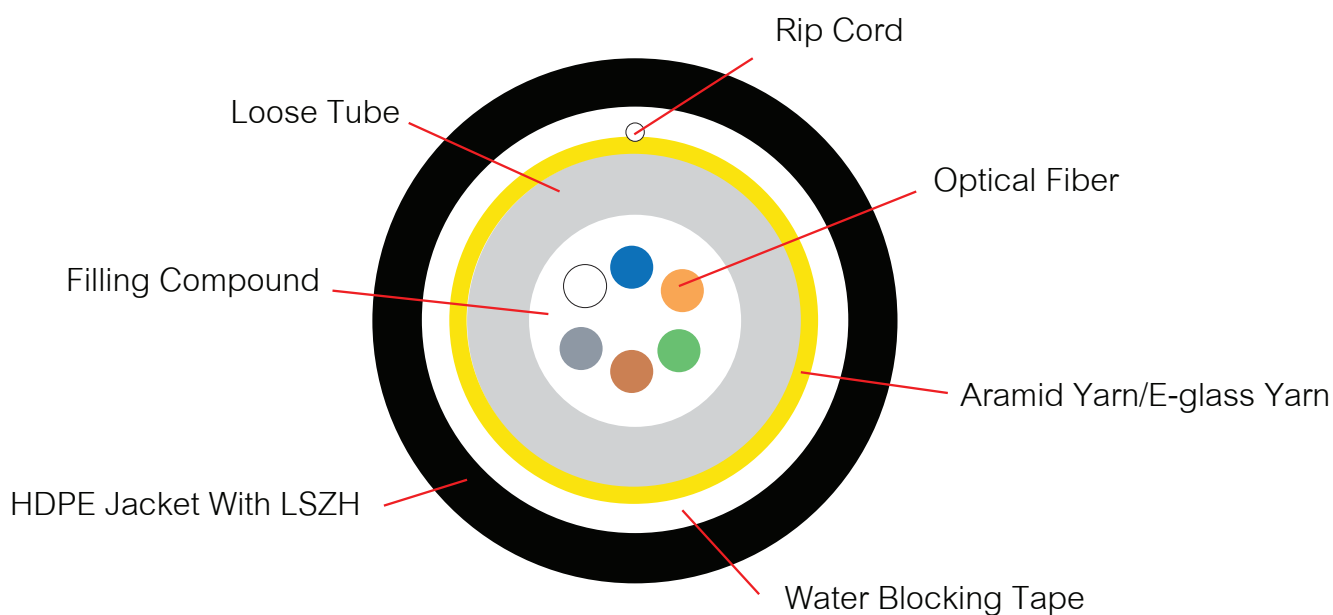

CONSTRUCTION

Structure		Parameter
Fiber count	Fibers	6/12
Loose tube	Material	PBT ,(Thixotropic Jelly compound)
	No. fiber per tube	6/12
	Diameter	Approx. 2.5
	Water blocking tape	NWF 0.3mm
	Rip cord	PEY
Strength member	Material	Aramid yarn/E-Glass yarn
Cable sheath	Material	HDPE with LSZH 1.6 ± 0.2 mm, with Rodent Repellent (LS2)
Core Diameter (µm)	Single mode / Multi mode	Single mode 9 / Multi mode 50
Cladding Diameter (µm)	9/125 µm (OS2)	125
Coating Diameter (µm)		250
Cable diameter overall		Approx.4.5
Cable Weight		Approx.9.6±1.0
Max tensile strength (N)	Short term	2700 N
	Long term	600 N
Max crush resistance (N/100mm)	Short term	2000 N
	Long term	1000 N
Min bending radius	Dynamic	15D
	Static	10D
Operation Temperate	Storage	-20-+75°C
	Installation	-40-+80°C
Rip Cord	Material	Polyester cords

OPTICAL CHARACTERISTICS

Optical Transmission Performance	Single Mode	Multi Mode			
	1310/1383/1550/1625 nm	850/1300 nm			
	9/125 µm (OS2)	62.5/125 µm (OS1)	50/125 µm(OS2)	50/125 µm (OS3)	50/125 µm (OS4)
Max Attenuation (dN/km)	0.35/0.35/0.21/0.23	3.0/0.8	2.7/0.8	2.7/0.8	2.7/0.8
Type Attenuation (dN/km)	0.33/0.31/0.19/0.20	2.7/0.6	2.5/0.7	2.3/0.6	2.3/0.6
Bandwidth (MHz/km)	N/A	200/600	500/500	1500/500	3500/500
850nm Laser bandwidth (MHz/km)	N/A	N/A	N/A	2000	4700
Numerical	0.13 ± 0.01	0.275 ± 0.015	0.200 ± 0.015	0.200 ± 0.015	0.200 ± 0.015

OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
Optical Specifications		ITU-T G.652D(SinglemodeOS2) 9/125 μm (OS2) ITU-T G651(Multimode) 62.5/125 μm , 50/125 μm
Attenuation	@1310nm	$\leq 0.35/\leq 0.33\text{dB/km}$
	@1383nm	$\leq 0.35/\leq 0.31\text{dB/km}$
	@1490nm	$\leq 0.24\text{db/km}$
	@1550nm	$\leq 0.21/\leq 0.19\text{dB/km}$
	@1625nm	$\leq 0.23/\leq 0.20\text{dB/km}$
Attenuation discontinuity		$\leq 0.05\text{ dB}$
Attenuation vs. Wavelength	1285 -1330 @1310nm	$\leq 0.05\text{ dB/km}$
	1525 -1575@1550nm	$\leq 0.05\text{ dB/km}$
Zero dispersion wavelength		1300 -1324 nm
Zero dispersion slope		$\leq 0.092\text{ ps}/(\text{nm}^2.\text{km})$
Dispersion	@1310nm	$\leq 3.5\text{ ps/nm.km}$
	@1550nm	$\leq 18\text{ ps/nm.km}$
Polarization mode dispersion(PMD)		$\leq 0.2\text{ ps/km}^{1/2}$
Cable cutoff wavelength (λ_{cc})		$\leq 1260\text{ nm}$
Effective group index of reaction	@1310nm	1.4675
	@1550nm	1.4681
Geometric Specifications		
Mode field diameter	@1310nm	$9.2 \pm 0.6\text{ }\mu\text{m}$
	@1550nm	$10.4 \pm 0.8\text{ }\mu\text{m}$
Cladding diameter		$125 \pm 1\text{ }\mu\text{m}$
Cladding non -circularity		$\leq 1.0\%$
Coating Material	Material	UV curable acrylate
	Diameter	$250 \pm 5\text{ }\mu\text{m}$
Coating/Cladding concentricity error		$\leq 12\text{ }\mu\text{m}$
Core/Cladding concentricity error		$\leq 0.5\text{ }\mu\text{m}$
Color Fiber Diameter		$250\text{ }\mu\text{m} \pm 15\text{ }\mu\text{m}$ (Colored)
Fiber proof-tested		0.69 GPa (1.0%, 100kpsi) in accordance with the optical fiber proof test by IEC 60793-1-30

OPTICAL FIBER CHARACTERISTICS

CATEGORY	DESCRIPTION	SPECIFICATIONS
Mechanical Specifications		
Proof test level		≥1.0 %
Fiber curl radius		≥4.0 m
Peak coating strip force		1.3 - 8.9N
Relative humidity		Up to 90%, no frost
Maximum Span Length	Sag 0.5%	40 m.
	Sag 1.0%	80 m.
Maximum Wind Velocity		126 km./hr.
Max. Tensile load	Installation	2700 N.
	Operation	600 N.
Maximum Crush resistance		2000 N./10 cm.
Minimum bending Radius	Installation	15 x Diameter of Cable
	Operation	10 x Diameter of Cable

IDENTIFICATION COLOR CODE OF FIBER AND LOOSE TUBE

The color code of the loose tubes and the individual fibers within each loose tube shall be in accordance TIA/EIA-598-C (Rev.TIA/EIA-598-A) and EIA-359-A

NO.	FIBER COLOR	LOOSE TUBE COLOR
1	Blue	Blue
2	Orange	Orange
3	Green	Green
4	Brown	Brown
5	Slate	Slate
6	White	White
7	Red	Red
8	Black	Black
9	Yellow	Yellow
10	Violet	Violet
11	Rose	Rose
12	Aqua	Aqua

PACKING AND DRUM

The cable is rounded on a non-returnable wooden drum. Cable Packing 4000m/reel. Both ends of cable are securely fastened to drum and sealed with a shrinkable cap to prevent ingress of moisture. The following information shall be marked on the outer sheath of the cable at an interval of about 1 meter.

- Cable type and number of optical fiber
- Manufacturer name
- Month and Year of Manufacture
- Cable length
- Logo and Thai word

The sequential number of the cable length shall be marked on the outer sheath of the cable at an interval of 1meter ± 1%

TEST REQUIREMENTS

Item	Method	Acceptance criteria
Tensile test	- Max. tensile strength: 1200 N	-Fiber strain at maximum
IEC 60794-1-2-E1A	- Sample length: 50 meters	-Load max. 0.33 %
TIA/EIA-455-33A	- Times: 1 hour	-Attenuation increase ≤ 0.1 dB
Crush or Compression test	- Load: 500 N	-No splits or cracks in the outer jacket
IEC 60794-1-2-E3	- Time: 10 minutes	-Attenuation increase ≤ 0.10 dB
TIA/EIA-455-41A	- Length: 100 mm	
Impact test	- Impact energy: 450 g	- No splits or cracks in the outer jacket
IEC 60794-1-2-E4	- Height: 1 meter	-Attenuation increase ≤ 0.10 dB (after the test)
TIA/EIA-455-25C	- Impact points: min.1	
	- Number of impacts: 5	
Torsion or Twist test	- 1 m cable length with 150 N weight	- No splits or cracks in the outer jacket
IEC 60794-1-2-E7	- $\pm 180^\circ$,10 cycles	-Attenuation increase ≤ 0.10 dB (after the test)
TIA/EIA-455-85A		
Repeated bending	- Radius = 20 $\times$ cable outer diameter	- No splits or cracks in the outer jacket
Cable bending Test	- 1m cable length with 150 N weight, 30 cycles	-Attenuation increase ≤ 0.10 dB (after the test)
IEC 60794-1-2-E6,		
TIA/EIA-455-104A		
IEC 60794-1-2-E11B		
Temperature cycling test	- Temperature step: +20 $^\circ$ C -40 $^\circ$ C+70 $^\circ$ C-40 $^\circ$ C	-Attenuation variation for reference
IEC 60794-1-2-F1	+70 $^\circ$ C+20 $^\circ$ C	value(the attenuation to be measured before
TIA/EIA-455-3A	- Time per each step: 16 hrs.	test at +20 $\pm$ 3) ≤ 0.10 dB/km
	- Number of cycles: 2 cycles	
Water penetration test	- Water height: 1m	-No water leakage at the end of the sample
IEC 60794-1-2-F5	- Sample length:3m	
TIA/EIA-455-82B	- Duration of test: 24hrs	
Drip test	- Five 0.3m samples suspended vertically in a climate	-No filling compound shall drip from tubes after 24 hrs.
IEC 60794-1-2-E14	chamber, raised temperature to +70 $^\circ$ C	

ORDER INFORMATION

