

VDO WALL CONTROLLER

4K Video Wall Controller, 3x3



OVERVIEW

The 4K 3x3 video wall controller, support 1-way HDMI input and 9-way HDMI outputs, the main function is to divide a complete HD image signal into 9 blocks and assign to 9 video display units (such as Rear projection unit, LCD TV, etc.), Complete with 9 HDMI high-definition video display units to form a large dynamic image screen. As a video wall controller, It support display a single complete picture with HD multiple splicing modes, compose a video wall perfectly without any control software, plug and play, easy to operate. It was widely used in occasion of advertising screen, restaurant, teaching, etc



FEATURE

- Support HDMI input
- Support 9 HDMI outputs
- Support multiple splicing modes, easy to operate, plug and play
- Support 8/10/12 bit deep color;
- Support IR control.

APPLICATIONS




Outdoor video wall



Shopping mall video wall





Monitor room

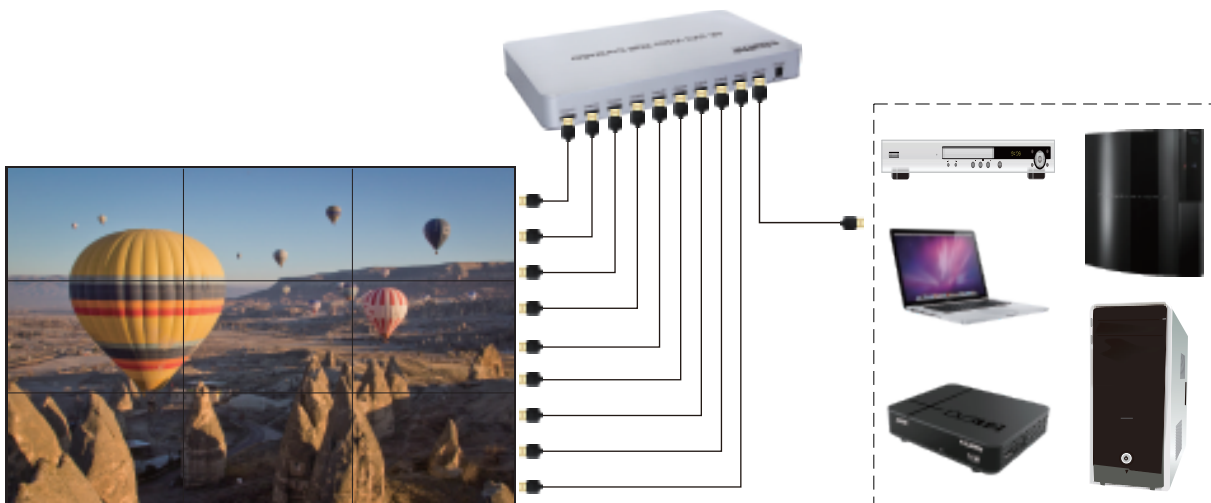

SPECIFICATIONS

HDMI input resolution	the highest support 3840x2160/30Hz
HDMI output resolution	the highest support1920x1080/60Hz
Support audio format	stereo
Input cable length	≤8m AWG26 HDMI standard cable
Output cable length	≤10M,AWG26 HDMI standard cable
Max working current	1.6 A
Power adapter specifications	input AC (50HZ, 60HZ) 100V-240V Output 12V DC/3A
Operating Temperature range	(-10 °C ~ +45°C)
Dimension (L x W x H)	305x185x35(mm)
Weight	1747g

OPERATING AND CONNECTING

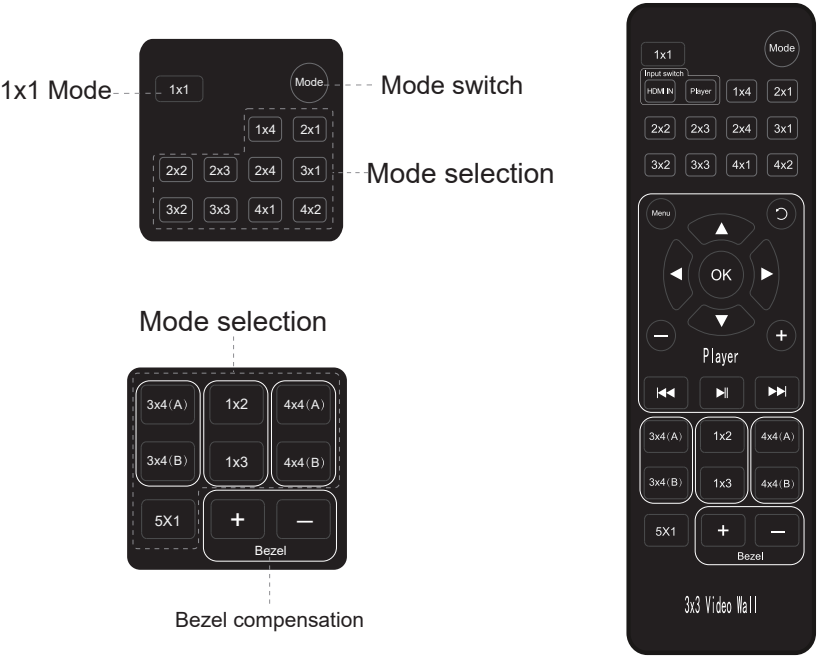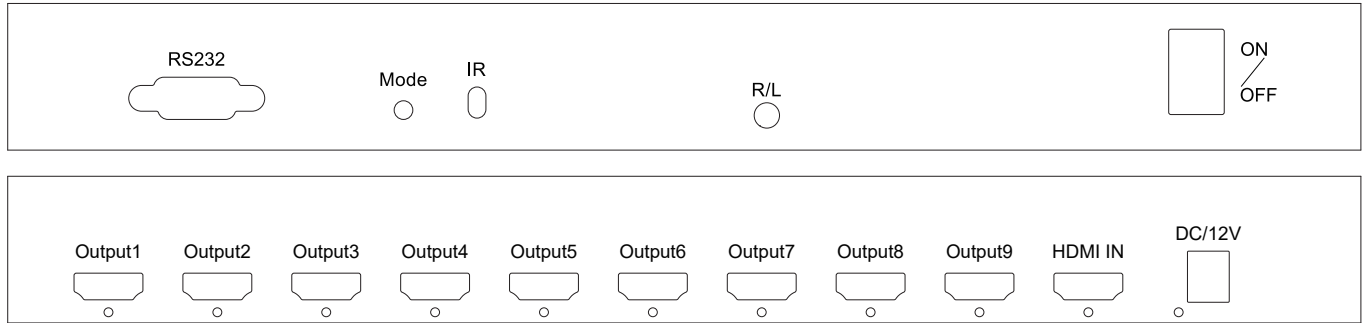

ORDER INFORMATION

PRODUCT	PART NUMBER
4K Video Wall Controller, 3x3	MD-4KHDVW-0303