

HDMI CONVERTOR

Digital to Analog Converter



OVERVIEW


This Digital to Analog audio converter is designed for home or professional audio switching. It can convert coaxial or optical digital audio signal to R/L analog audio signal. Also it can connect with an amplifier device through standard RCA-style jacks.

FEATURE

- Convert coaxial or optical digital audio to R/L analog audio
- Support 3.5mm audio and R/L audio output
- Support sample rate: 32, 44.1, 48 and 96 KHz
- R/L channel of S/PDIF is 24 bit
- Support the transmission of electromagnetic noise
- Install in minutes and easy to operate



APPLICATIONS

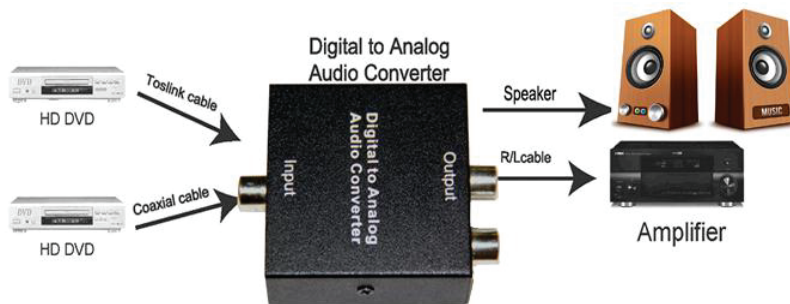

SPECIFICATIONS

Input Audio	Coaxial or Optical digital audio
Output Audio	R/L and 3.5mm audio
Input audio connector	Optical and 1XRCA (Coaxial)
Output audio connector	2XRCA(R/L) and 3.5mm audio
Sample rate	32, 44.1, 48 and 96 KHz
Max working current	250mA
Power adapter format	Input: AC (50Hz, 60Hz) 100V-240V; Output: DC 5V/500mA
Operating Temperature range	(-15°C to +55°C)
Operating Humidity range	5 to 90% RH (No Condensation)
Dimension (L x W x H)	45x48x20(mm)
Weight	62g

ORDER INFORMATION

PRODUCT	PART NUMBER
Digital to Analog Converter	MD-DA

FOCOMM (THAILAND) CO., LTD

12 Soi Sukhaphiban 5 Soi 5 Yaek 3, Tha Raeng Subdistrict, Bang Khen District Bangkok 10220

Email : info@focomm-cabling.com www.focomm-cabling.com

