FEATURE

- Modular design, easily assemble and disassembl for delivery, low cost.
- Various optional accessories according to requirements.
- Static load: 150kg
- Lever of protection: IP20
- Surface finish: Degreased, acid cleaned, phosphoric, water cleaned, electro-static powder coating, meet ROHS standard.
- Optional color: black/gray
- Optional accessories.

Open Rack 42 U Type A   **Open Rack 42 U Type B**

MATERIALS

Galvanized Cool rolled steel

Thickness: Front and bottom beams:1.5mm

Else in 1.2mm

Tempered smoky-gray glass with thickness of 5mm.

Daimention : 600x600mm.

APPLICATION

Widely used in network system, educational system, broadcasting system and telecommunication system. Suitable for placing server computer and precision electronic equipment.
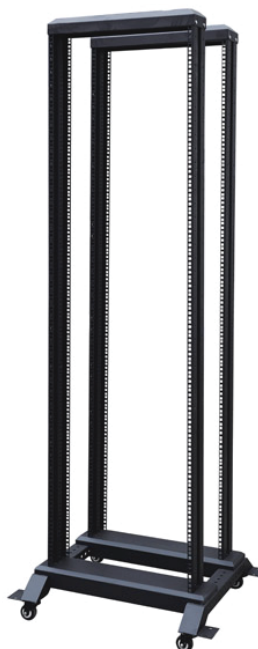
STANDARD

Comply with ANSI/EIA RS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92.Compatible with metric, ETSI and 19' international standard. ROHS standard.

ORDER INFOMATION

PRODUCT	DESCRIPTION	PART NUMBER
42 U	Open Rack Type A 42 U	R-OPA42
	Open Rack Type B 42 U	R-OPB42

FOCOMM (THAILAND) CO., LTD
12 Soi Sukhaphiban 5 Soi 5 Yaek 3, Tha Raeng Subdistrict,Bang Khen District Bangkok 10220
Email : info@focomm-cabling.com   www.focomm-cabling.com

ISO 9001   ISO 14001   ISO 45001:2018   UL