

# SURGE PROTECTOR PRODUCT

AC C Class ( Three Phase ) Power Surge Protection




## FEATURES

- Thermal disconnect device
- High current capacity, quick response
- Low residual voltage, free of leakage current
- Remote warning
- 40kA maximum surge current
- 50/60Hz 385V, Protection mode: L1/L2/L3/N-PE
- Easy installation with Din rail mounting
- Status indicators visually verify protection level
- Plug connectors for quick and easy connection or rewiring


## APPLICATIONS

- Protection of C class AC Power System
- Protection of power distribution system
- Protection of terminal devices
- Sensitive electronic equipment
- Telecom centers
- Automatic control centers
- Intelligent buildings
- Industrial enterprises
- Medical institutes
- CCTV, Solar Cell

## Dimensions

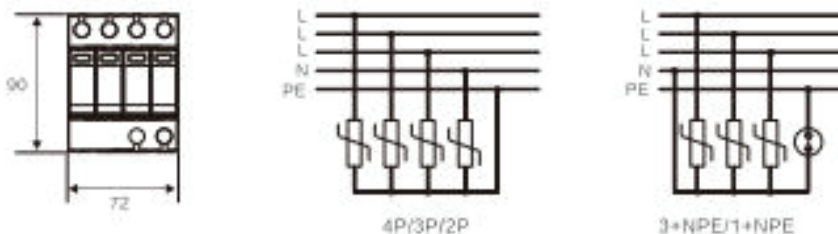

## Wiring Diagram

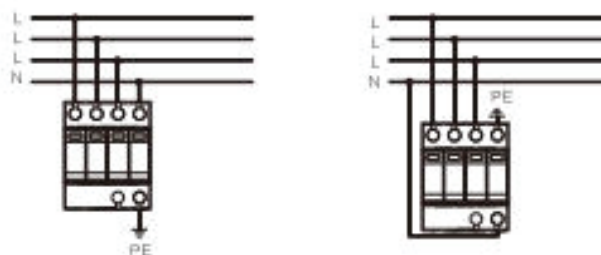

## SPECIFICATIONS

Model	SP-PC40-385/4
Nominal operating voltage Un	220/300VAC
Maximum continuous operating voltage Uc	385VAC
Nominal discharge current In (8/20μs)	20KA
Maximum discharge current I <sub>max</sub> (8/20μs)	40KA
Protection level Up (8/20μs,20KA)	≤1.5KV - ≤1.7KV
Response time Ta	≤25ns
Protection modes	4:L1/L2/L3/N-PE 3+N:L1/L2/L3-N,N-PE 2:L/N-PE 1+N:L-N,N-PE
Front circuit breaker	63A
Dimension	90*72*68mm
Weight	250-1200g
Mounting type	DIN rail : 35mm
Housing material	Anti-flaming
Index of protection	IP20
Operating environment	Temperature:-40-+85°C humidity: ≤95%
Remote control (optional)	Normally closed, normally open or COM
warranty	3 year warranty
Work Status	Green:ok Red:defect

### Standards Compliance

IEC 61312-1, IEC 61312-3 (pending), IEC 61024-1, IEC 61000-4-5, IEC 61643-1-1, IEC 61643-1-2 (pending), IEC 62066 (pending), IEC 61643-2-1 (pending), IEC 61643-1, NFC 61740, VDE 0675, UL 1449, BS 6651, ROHS, ISO9001, FCC, Ce