

HDMI SWITCH

4K HDMI 8x1 multi- viewer



OVERVIEW


4K HDMI 8x1 Multi-viewer is a high performance with eight HD screen segmentation and seamless switching output switch. It can display 8 HD digital video signal on the same screen, and has a variety of video segmentation, seamless switching 8 HD input signal synchronously. The control methods of the switch is flexible, it can be switched via button and IR control. It's a very practical and stable switch and easy to install, can be used in the major projects, meeting halls and other places.



FEATURE

- Support 8 HDMI inputs, one HDMI output
- Support 8 HDMI signal screen segmentation
- Support 8 HDMI signal seamless switching
- Support 4 ways to switch audio and video (remote, button, RS232, and Ethernet port IP: 192.168.1.168)
- The input resolution support 1080P,720P,1080i,1024x768,1360x768 etc
- The output resolution support 1080P@60Hz, 3840x2160@30Hz/60Hz
- Support audio and video superposition
- More clearer subtitles
- Power: DC12V/2A
- Net weight : 792 g
- Size(Length*Width*Height) : 252mm * 105mm *25mm

APPLICATIONS

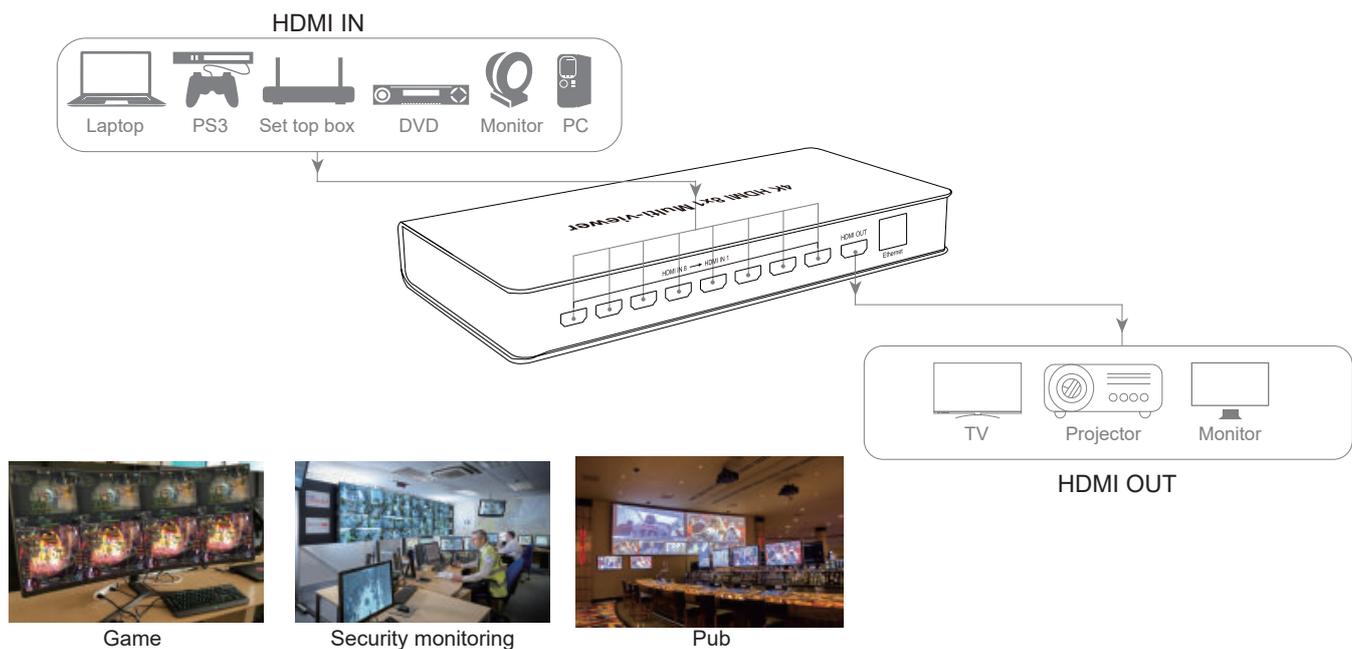


FOCOMM (THAILAND) CO., LTD

12 Soi Sukhaphiban 5 Soi 5 Yaek 3, Tha Raeng Subdistrict, Bang Khen District Bangkok 10220


Email : info@focomm-cabling.com www.focomm-cabling.com



THE INSTRUCTION OF REMOTE CONTROL BUTTON

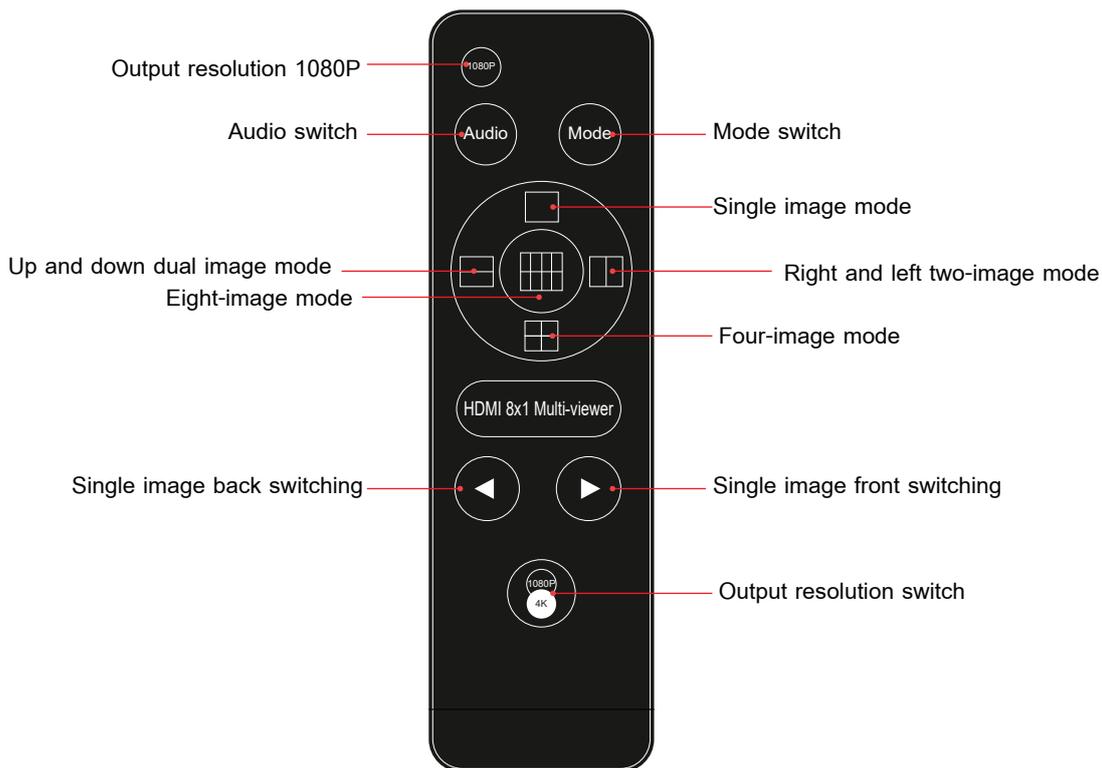

COMMON MULTI-VIEWER MODE:

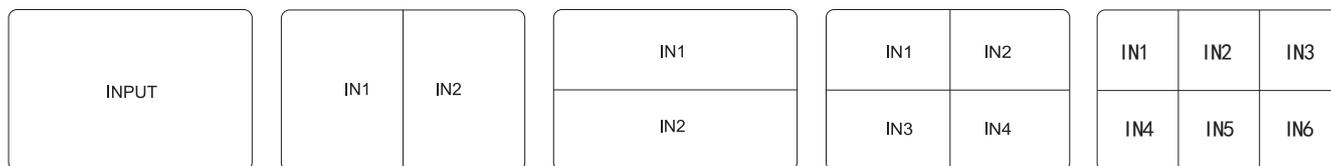


MODE1

MODE2


MODE3

MODE4

MODE5




MODE6




MODE7




MODE8



MODE9



MODE10



MODE11

MODE1 Single image display mode Channel 1-8 seamless switch

MODE2&MODE3 Dual image display mode

MODE4 Quad display mode

MODE6 Six display mode

MODE6 - MODE11 8 Image display mode

ORDER INFORMATION

PRODUCT	PART NUMBER
4K HDMI 8x1 multi-viewer	MD-4KHDMV-0801