

MEDIA CONVERTER PRODUCTS

Media Converter 10/100/1000 WDM



FEATURE

- Complies with IEEE 802.3, IEEE 802.3u, IEEE802.3z, IEEE802.3ab, IEEE 802.3x auto-negotiation
- Works at 10Mbps or 100Mbps, full or half-duplex mode, or 1000Mbps full-duplex mode
- Extends distances ranging from 550m(multi-mode fiber) to 120km(single-mode fiber)
- Supports auto MDI/MDIX function
- Status LED for easy monitoring of device status
- Supports jumbo frame size 9K bytes
- External power supply
- Supports independent LFP function
- FCC Class A & CE approved, RoHS, UL.




PRODUCT DESCRIPTION

Media converter series comply with IEEE 802.3/ab Gigabit Ethernet standard. It supports two types of media for network connection such as 10/100/1000 Base-T to 1000 Base SX/LX and connects these two types of segments to operate smoothly series can be used in 16 slot chassis as plug in module series Fiber Media Converter transforms 1000Base-T (Copper Gigabit) media to 1000Base-SX/LX (Fiber Gigabit) media and vice versa. The 1000Base-T port supports full-duplex Gigabit connection at wire speed with RJ45 connector. The fiber Gigabit connection supports shortwave (SX) or long wave (LX) laser optic with multi-mode or single-mode SC type connector.

This converter will give your Copper Gigabit connection the ability to interface with fiber connection over a distance up to 80 km! 10/100/1000 means, that media converter that converts the electrical signal of a 10/100/1000 Ethernet signal from copper to fiber. This solution will offer a low-cost integration option for network managers who want to migrate from 10/100 networks to Gigabit Ethernet. Gigabit only switches can now be connected to 10/100 networks without the need to upgrade the 10/100 side, allowing network managers to add new equipment gradually.

APPLICATION

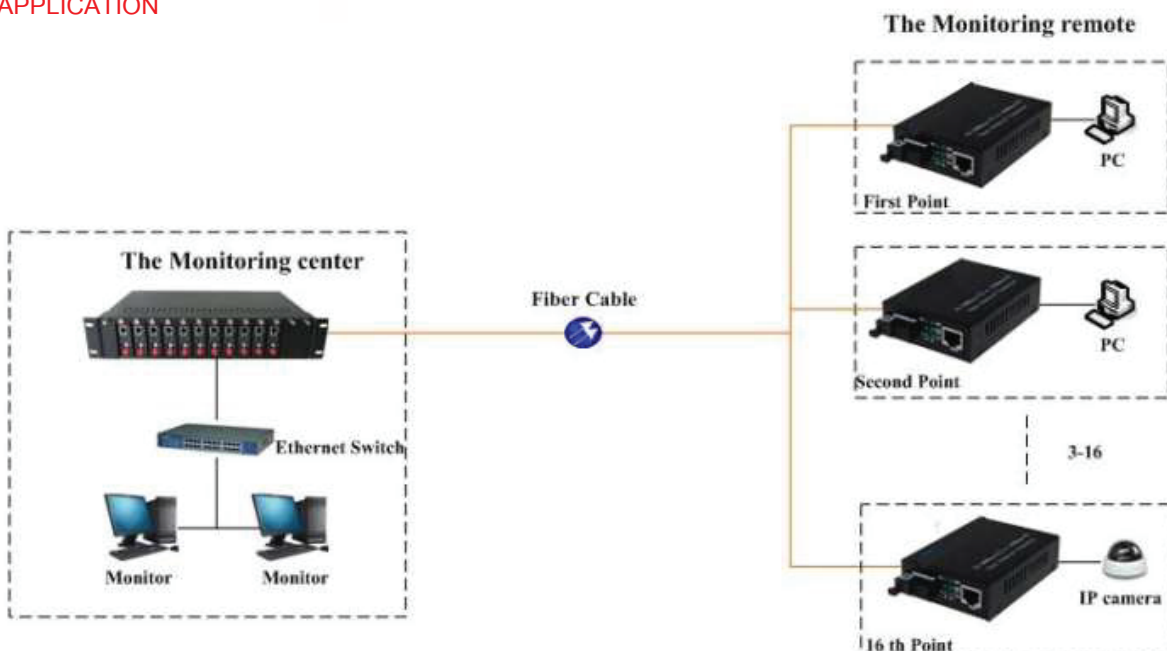

SPECIFICATION

Interface

- 1 x Ethernet port (RJ45) 10/100/1000Base-Tx
- 1 x Optical port (1xSC) 1000Base-Fx

Optical Port

- Available for 1310nm and 1550nm Single mode, and 850nm Multi mode;
- Transfer Distance: up to 120km;
- Connectors: SC/PC, ST/PC, FC/PC optional
- Fiber core: 8.3um, 8.7um, 9um and 10um on single mode fiber, 50, 62.5 and 100um on multi-mode fiber

Ethernet Port

- Standard: IEEE802.3, IEEE802.3u, IEEE 802.3ab, IEEE802.3x
- Available speed: force 10Mbps, force 100Mbps, force 1000Mbps and auto-detective 10/100/1000Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing

LED Indicators

- Power, FDX, Status, Speed, FX Link/Act, TX Link/Act

Physical Characteristics

- Housing: Metal enclosure
- Dimensions: 94 x 70 x 26mm (D x W x H)
- Weight: 0.28kg

Environmental Limits

- Operating Temperature: -20°C to 70°C
- Storage Temperature: -20°C to 70°C
- Operating Humidity: 10% to 90% RH
- Storage Humidity: 5% to 90% RH

Power Requirement

- Input: 5VDC 1A

Agency Approvals

- FCC Part 15 of Class A & CE approved, RoHS, UL.

ORDER INFORMATION

PRODUCT	PART NUMBER
Media Converter 10/100/1000 WDM, 1310nm Tx, 1550nm Rx, 20Km	MC-GW13-20
Media Converter 10/100/1000 WDM, 1550nm Tx, 1310nm Rx, 20Km	MC-GW15-20
Media Converter 10/100/1000 WDM, 1310nm Tx, 1550nm Rx, 40Km	MC-GW13-40
Media Converter 10/100/1000 WDM, 1550nm Tx, 1310nm Rx, 40Km	MC-GW15-40
Media Converter 10/100/1000 WDM, 1310nm Tx, 1550nm Rx, 80Km	MC-GW13-80
Media Converter 10/100/1000 WDM, 1550nm Tx, 1310nm Rx, 80Km	MC-GW15-80